



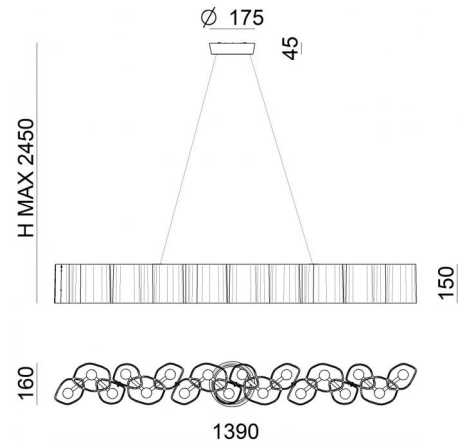

Pendant Luminaires | 220-240 V
180 topLED 30 W DC - 35 W AC | CRI 90
8680



| Technical data | |
|--|---------------------|
| Construction year | 2019 |
| Type | Pendant Luminaires |
| Installation position | Ceiling |
| Installation environment | Indoor |
| Light Source | LED |
| Circuit structure | topLED |
| Optics | Diffused |
| Light emission direction | downward and upward |
| Nominal power | 30 W DC |
| Total Power | 35 W |
| Source lumens | 3450 lm |
| Voltage | 220 - 240 V AC |
| Frequency | 50 - 60 Hz |
| CCT / Tone | 2700 K |
| Colour rendering index | 90 Ra |
| C.C. / C.V. | AC |
| Safety class | 1 |
| IP | IP20 |
| Glow wire test | 850° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| Driver included | Driver |
| Dimmable article | Phase cut |
| Directional | No |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | Yes |
| Cable length | 2.5 m |
| Resin potting | No |
| Type of light emission | Double emission |
| Net weight | 4.48 Kg |
| Electrostatic discharge protection | No |
| Surge protection | No |

| Finishing casing | |
|---------------------------|--------------------|
| Material | Die-cast Aluminium |
| Colour | White |
| Processing | Powder coating |
| Finishing diffuser | |
| Material | PC |
| Colour | Opal white |
| Cables Pendant Luminaires | |
| Max cable length | 2500 mm |

Pendant Luminaires | 220-240 V | 180 topLED 30 W DC - 35 W AC | CRI 90 | Base
8680

Double emission pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 180 topLEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 3450 lm, with a 115.0 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium and features a white finish, processed by means of powder coating; the diffuser is made of PC. The ingress protection degree is IP20; the total weight is of 4.48 kg.

The total absorbed power is 35 W. The power supply cable is included and features a 2.5 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains 6 light sources of energy efficiency class F.

Illuminotechnical Features


| | |
|---|----------------|
| Light Output Ratio (LOR) | 67 % |
| Source lumens | 3450 lm |
| Delivered lumens | 2315 lm |
| Consumption | 35 W |
| Luminaire efficacy | 66 lm/W |
| Colour temperature | 2700 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Colour rendering index | 90 Ra |
| Junction temperature (lighting fixture) | 80 |
| Standard Operating Ambient Temperature | 25°C |

LED Life / Failure Ratio

L70 B20 C0 72500h (at Tj 115 Ta 25)

OPTICAL

| | |
|-----------------------------|--------------|
| C0/C180 optics | 180° |
| Light distribution symmetry | Asymmetrical |

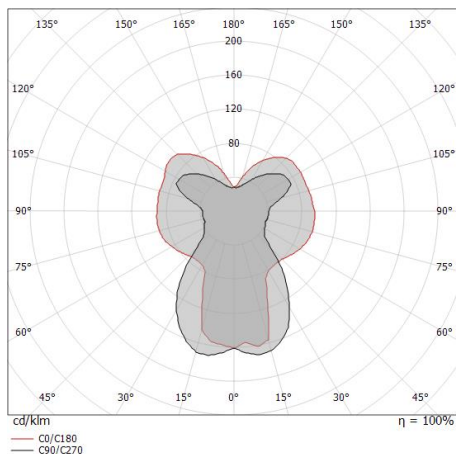



Honey | Pendant Luminaires | Accessories
8680



Dimmer
 220-240V

Code
KIT0026



Dimmer
 Radio-frequenza, 85-240V

Code
KIT0080