
Campana

Pendant Luminaires | 220-240 V 1 topLED 28 W DC - 31 W AC | CRI 90 9300



Technical data		
Construction year	2021	
Туре	Pendant Luminaires	
Installation position	Ceiling	
Installation environment	Indoor	
Light Source	LED	
Circuit structure	topLED	
Optics	Diffused	
Light emission direction	downward	
Nominal power	28 W DC	
Total Power	31 W	
Source lumens	3234 lm	
Voltage	220 - 240 V AC	
Frequency	50 - 60 Hz	
CCT / Tone	2700 K	
Colour rendering index	90 Ra	
C.C. / C.V.	AC	
Safety class	1	
IP	IP20	
Glow wire test	650°	
Direct mounting on normally flammable surfaces	Yes	
CE	Yes	
Driver included	Driver	
Dimmable article	DALI-2 - PUSH DIM	
Directional	No	
Tilting	No	
Walk-over	No	
Drive-over	No	
Cable included	Yes	
Cable length	3 m	
Resin potting	No	
Type of light emission	Single emission	
Net weight	3.600 Kg	
Electrostatic discharge protection	No	
Surge protection	No	

$[H [___] \ c.c. ____] \ c.c. ____] \ (\frown)$



Aluminium
Coating
PMMA
opaline
l frame
metal
Coating

Campana

Pendant Luminaires | 220-240 V | 1 topLED 28 W DC - 31 W AC | CRI 90 | Base 9300

Single emission pendant luminaires for indoor application. The super warm LED light source with a diffused light distribution is composed of 1 topled LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 3234 lm, with a 115.5 lm/W nominal luminous efficacy.

The device body is made of aluminium, processed by means of coating; the diffuser is made of pmma; the mounting frame is made of metal, processed by means of coating. The ingress protection degree is IP20; the total weight is of 3.600 kg.

The total absorbed power is 31 W. The power supply cable is included and features a 3 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class F.

Illuminotechnical Features	
Light Output Ratio (LOR)	57 %
Source lumens	3234 lm
Delivered lumens	1848 lm
Consumption	31 W
Luminaire efficacy	59 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25°C


LED Life / Failure Ratio

L70 B20 C0 72500h

25.3
25.4
S=0.25H
70/50/20

OPTICAL

C0/C180 optics	114°
Light distribution simmetry	Symmetrical

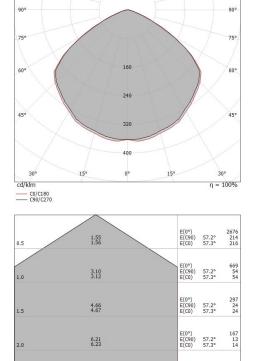

nce [m] Cone diameter [m] Il CO/CL80 (Half-peak divergence: 114.6°) C90/C270 (Half-peak divergence: 114.4°)

7.76

9.31

E(0°) E(C90) E(C0)

E(0°) E(C90) E(C0) 57.2° 57.3°

57.2° 57.3°

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

3.0