
## Trepiù




Pendant Luminaires | 220-240 V 1 topLED 24 W DC - 27 W AC | CRI 90 9307





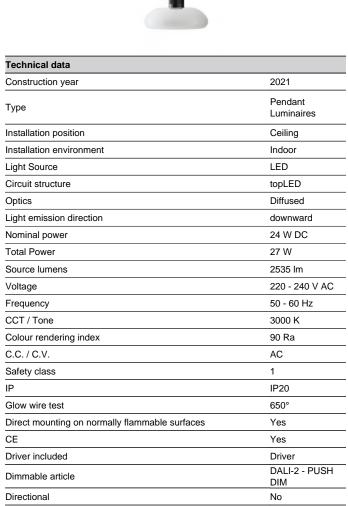

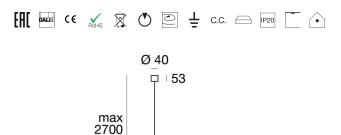

234



Finishing casing

Material plastic - Aluminium

Colour black - White RAL 9016

Processing Coating

Finishing diffuser			
Material	PMMA		
Processing	Sandblasting		

Finishing mounting frame				
Material	metal			
Processing	Coating			

No

Nο

No

Yes

No

No

No

2.5 m

Single emission 2.400 Kg

Tilting

Walk-over

Drive-over

Cable included

Cable length

Resin potting

Net weight

Surge protection

Type of light emission

Electrostatic discharge protection

## Trepiù



Pendant Luminaires | 220-240 V | 1 topLED 24 W DC - 27 W AC | CRI 90 | Base **9307** 


Single emission pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 1 topled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2535 lm, with a 105.6 lm/W nominal luminous efficacy.


The device body is made of plastic and features a black finish The device body is made of aluminium and features a white ral 9016 finish, processed by means of coating; the diffuser is made of pmma with a sandblasting treatment; the mounting frame is made of metal, processed by means of coating. The ingress protection degree is IP20; the total weight is of 2.400 kg.

The total absorbed power is 27 W. The power supply cable is included and features a 2.5 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

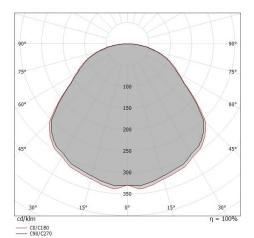



## Energy efficiency class

This product contains a light source of energy efficiency class E.

Illuminotechnical Features		
Light Output Ratio (LOR)	60 %	
Source lumens	2535 lm	
Delivered lumens	1525 lm	
Consumption	27 W	
Luminaire efficacy	56 lm/W	
Colour temperature	3000 K	
Standard Deviation of Colour Matching	3 Step MacAdam	
Colour rendering index	90 Ra	
Junction temperature (lighting fixture)	80	
Standard Operating Ambient Temperature	25°C	

## LED Life / Failure Ratio

L70 B20 C0 72500h