


Megafono



Pendant Luminaires | 220-240 V | 6xE14
9577

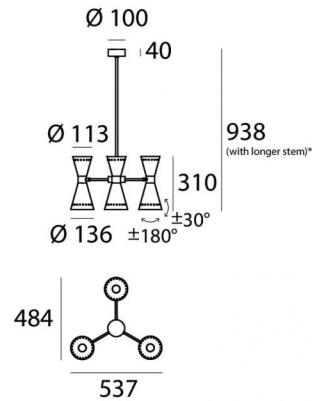

| Technical data | |
|--|---------------------|
| Construction year | 2021 |
| Type | Pendant Luminaires |
| Installation position | Ceiling |
| Installation environment | Indoor |
| Lamp cap | 6 x E14 |
| Light emission direction | downward and upward |
| Frequency | 50-60 Hz |
| Optics | Diffused |
| Safety class | 1 |
| IP | IP20 |
| Glow wire test | 650° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| Dimmable article | No |
| Directional | Swivelling |
| total angle (vertical plane) | 360 ° |
| total angle (horizontal plane) | 60 ° |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | No |
| Resin potting | No |
| Net weight | 4.410 Kg |

| Finishing casing | |
|------------------|----------------|
| Material | Brass |
| Colour | gold |
| Processing | Electroplating |

| Finishing diffuser | |
|--------------------|---------|
| Material | metal |
| Processing | Coating |

| Finishing mounting frame | |
|--------------------------|----------------|
| Material | Brass |
| Colour | gold |
| Processing | Electroplating |



Pendant Luminaires | 220-240 V | 6xE14
9577

Double emission pendant luminaires for indoor application. LED lamplamp included, lamp cap 6xE14.

The device body is made of brass and features a gold finish, processed by means of electroplating; the diffuser is made of metal with a coating treatment; the mounting frame is made of brass, with a gold finish, processed by means of electroplating. The ingress protection degree is IP20; the total weight is of 4.410 kg.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains 6 light sources of energy efficiency class E.

Illuminotechnical Features

| | |
|---------------|---------|
| Source lumens | 4836 lm |
|---------------|---------|

| | |
|--------------------|--------|
| Colour temperature | 2700 K |
|--------------------|--------|

| | |
|------------------------|-------|
| Colour rendering index | 80 Ra |
|------------------------|-------|

| | |
|---|----|
| Junction temperature (lighting fixture) | 80 |
|---|----|

| | |
|--|------|
| Standard Operating Ambient Temperature | 25°C |
|--|------|