





Plafón | 220-240 V | 126 topLED 55 W DC - 55 W AC | CRI 90  
8895

Double emission ceiling lights for indoor application. The warm white LED light source with a diffused light distribution is composed of 126 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 6219 lm, with a 113.1 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium and features a white finish, processed by means of powder coating; the diffuser is made with a laser engravings treatment; the mounting frame is made of metal, with a white finish, processed by means of coating. The ingress protection degree is IP40; the total weight is of 7.645 kg.

The total absorbed power is 55 W.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

### Clase de eficiencia energética

Este producto contiene 3 fuentes de luz de clase de eficiencia energética E.

### Características Luminotécnicas

Light Output Ratio (LOR)	48 %
Flujo luminoso (fuente)	6219 lm
Flujo luminoso de luminaria	2998 lm
Consumption	55 W
Rendimiento luminoso de las luminarias	54 lm/W
Temperatura de color	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Índice de rendimientos cromático	90 Ra
Temperatura de unión (luminaria)	80

Temperatura estándar del ambiente de servicio 25°C

### LED Life / Failure Ratio



L70 B20 C0 72500h (at Tj 115 Ta 25 )

### UGR

UGR axial	16.5
UGR transversal	16.8
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

Óptica C90/C270	50°
Óptica C0/C180	57°
Light distribution simmetry	Symmetrical 2 assis

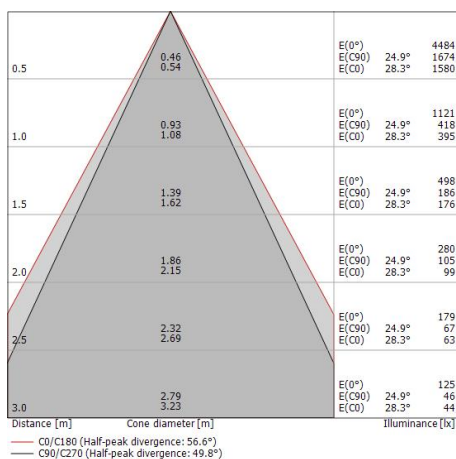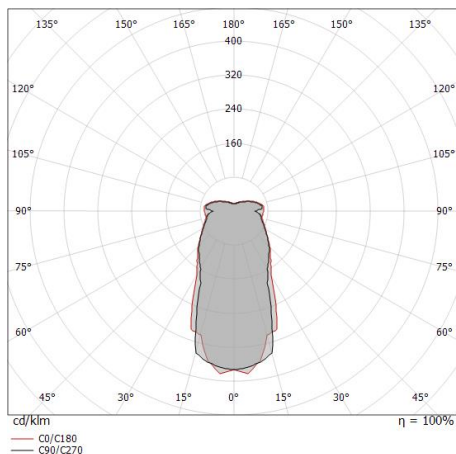



Demi | Ceiling Lights | Accessories  
**8895**



Dimmer  
Bluetooth, 220-240V

**Code**  
KIT0079