




Deckenleuchten - Pendelleuchte | 220-240 V
84 topLED 37 W DC - 37 W AC | CRI 80
8894



Technische Daten	
Designer	Mirco Crosatto
Jahr der Verwirklichung	2019
Typ	-- Oberfläche
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Gesamtleistung	37 W
Lichtstrom (Lichtquelle)	4198 lm
Voltage	220 - 240 V AC
Frequency	60 - 50 Hz
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP40
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	DALI - PUSH DIM
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Zweiflammig
Nettogewicht	4.2 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein
Optiktechnologie	Optilight TM

Oberfläche Gehäuse

Material	Stranggepresstes Aluminium
Farbe	Weiß geprägtem RAL 9003
Bearbeitungstyp	Pulverbeschichtung

Oberfläche Diffusor

Farbe	transparent
-------	-------------

Oberfläche Fassung

Material	Metall
Farbe	Weiß geprägtem RAL 9003
Bearbeitungstyp	Lackierung

Deckenleuchten - Pendelleuchte | 220-240 V | 84 topLED 37 W DC - 37 W AC | CRI 80 8894



Double emission ceiling lights or pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 84 topLEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 4198 lm, with a 113.5 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium and features a embossed white ral 9003 finish, processed by means of powder coating; the diffuser is made with a laser engravings treatment; the mounting frame is made of metal, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP40; the total weight is of 4.2 kg.

The total absorbed power is 37 W.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

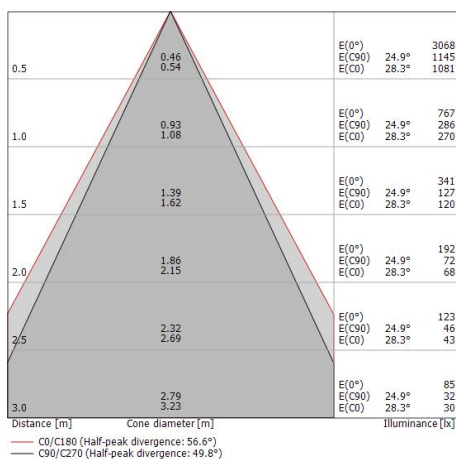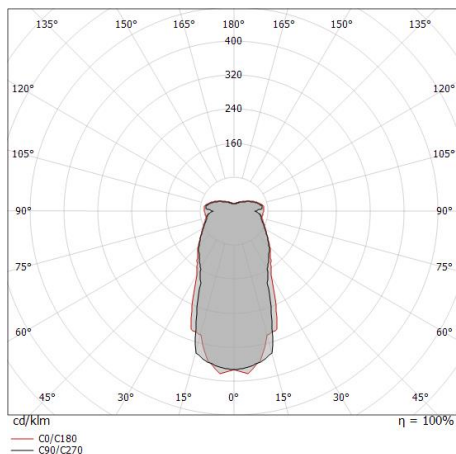

Energieeffizienzklasse

Dieses Produkt enthält 3 Lichtquellen der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	48 %
Lichtstrom (Lichtquelle)	4198 lm
Leuchten Lichtstrom	2051 lm
Consumption	37 W
Leuchten Lichtausbeute	55 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	80 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

LED Life / Failure Ratio


L70 B20 C0 72500h (at Tj 115 Ta 25)

UGR

UGR axial	17.3
UGR transversal	17.6
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Optik C90/C270	50°
Optik C0/C180	57°
Light distribution simmetry	Symmetrical 2 assis



Dimmer
Bluetooth, 220-240V

Code
KIT0079