Derby_P

Suspension | 220-240 V
60 topLED 24 W DC - 28 W AC | CRI 90
8904

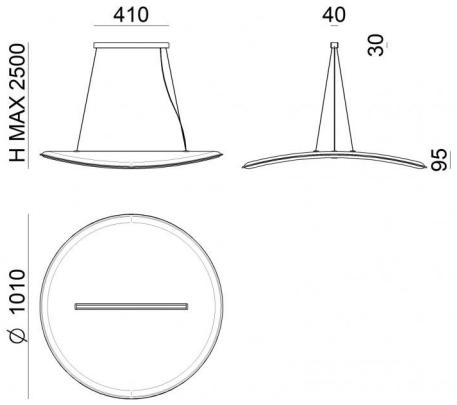

Données techniques	
Année de réalisation	2019
Typologie	Surface
Position d'installation	Plafond
Environnement d'installation	Intérieur
Source lumineuse	LED
Pouvoir total	28 W
Flux lumineux (source)	2648 lm
Efficacité nominale	240 - Array AC
Frequency	60 - 50 Hz
Température de couleur / Tone	3000 K
Indice de rendu chromatique	90 Ra
C.C. / V.C.	AC
Classe d'isolation	1
IP	IP20
Essai au fil incandescent	650°
Montage direct sur des surfaces normalement inflammables	Oui
CE	Oui
Driver inclus	Driver
Article à intensité variable	DALI
Orientable	Non
Basculement	Oui
angle total (plan horizontal)	70 °
Piétinable	Non
Carrossable	Non
Câble inclus	Oui
Longueur du câble	2.5 m
Revêtement en résine	Non
Type d'émission lumineuse	Double émission
Poids net	4,005 Kg
Protection contre les décharges électrostatiques	Non
Protection contre les surtensions	Non

Finition corps	
Matériau	Pet
Couleur	marron

Finition diffuseur	
Matériau	PC - Aluminium
Couleur	opalin
Fabrication	Vernissage

Finition monture	
Matériau	métal
Fabrication	Vernissage

Cables Suspension	
Longueur max de	2500 mm

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Derby_P

Suspension | 220-240 V | 60 topLED 24 W DC - 28 W AC | CRI 90
8904

Double emission pendant luminaires for indoor application. The warm white LED light source with a general lighting light distribution is composed of 60 topled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2648 lm, with a 110.3 lm/W nominal luminous efficacy.

The device body is made of pet and features a brown finish; the diffuser is made of PC; the diffuser is made of aluminium with a coating treatment; the mounting frame is made of metal, with a 5g 9005 black finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 4,005 kg.

The total absorbed power is 28 W. The power supply cable is included and features a 2.5 m lenght.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

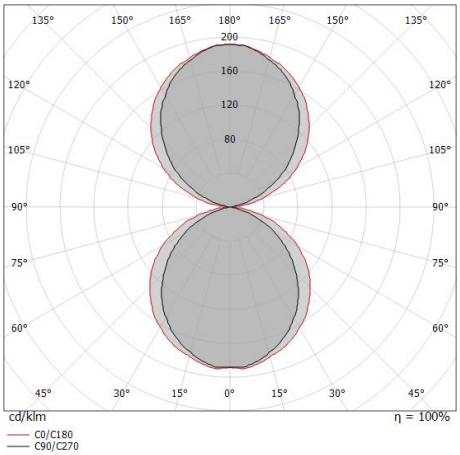

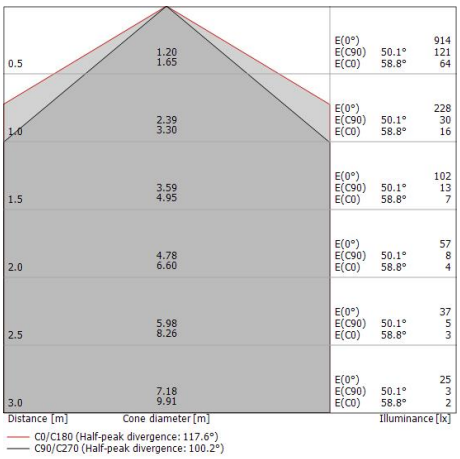

Classe d'efficacité énergétique
Ce produit contient 4 sources lumineuses de classe d'efficacité énergétique F.

Caractéristiques Techniques de l'éclairage	
Light Output Ratio (LOR)	45 %
Flux lumineux (source)	2648 lm
Flux lumineux du luminaire	1211 lm
Consumption	28 W
Efficacité lumineuse du luminaire	43 lm/W
Température de couleur	3000 K
Standards de Concordance de Couleur	3 Step MacAdam
Indice de rendu chromatique	90 Ra
Température de jonction (appareil)	80
Température standard de l'environnement de	25°C

LED Life / Failure Ratio
L70 B20 C0 72500h (at Tj 115 Ta 25)

UGR	
UGR axial	22
UGR transversal	25.4
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Light distribution simmetry	Symmetrical 2 assis
Optique C0/C180	118°
Optique C90/C270	100°

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Derby_P | Pendant Luminaires | Accessories
8904



Variateur
Bluetooth, 220-240V

Code
KIT0079

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.