

Plafón | 220-240 V | 1 topLED 38 W DC - 40 W AC | CRI 90
8164

Double emission ceiling lights for indoor application. The warm white LED light source with a array light distribution is composed of 1 topLED LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 4370 lm, with a 115.0 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a white finish, processed by means of coating; the diffuser is made of pmma; the mounting frame is made of metal, with a white finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 1 kg.

The total absorbed power is 40 W.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Clase de eficiencia energética

Este producto contiene 3 fuentes de luz de clase de eficiencia energética E.

Características Luminotécnicas


Light Output Ratio (LOR)	95 %
Flujo luminoso (fuente)	4370 lm
Flujo luminoso de luminaria	4159 lm
Consumption	40 W
Rendimiento luminoso de las luminarias	103 lm/W
Temperatura de color	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Índice de rendimientos cromático	90 Ra
Temperatura de unión (luminaria)	80
Temperatura estándar del ambiente de servicio	25°C

LED Life / Failure Ratio

L70 B20 C0 72500h

OPTICAL

Óptica C90/C270	180°
Light distribution simmetry	Asymmetrical

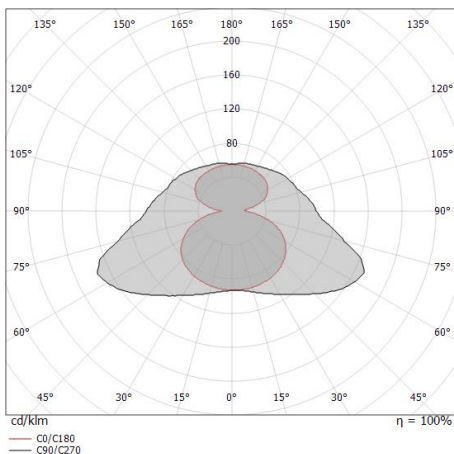



Diphy | Ceiling Lights | Accessories
8164



Dimmer
Bluetooth, 220-240V

Code
KIT0079