



Quad_P7

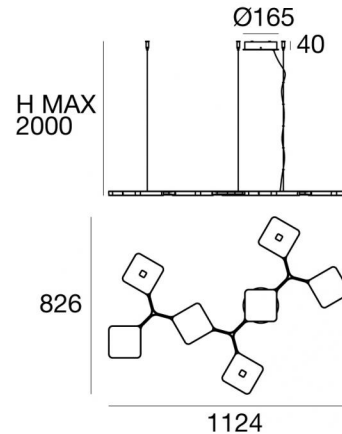

Colgantes | 220-240 V
165 topLED 49 W DC - 54 W AC | CRI 90
8526



Datos técnicos	
Designer	Pio e Tito Toso
Año de realización	2016
Tipo	Superficie
Posición de instalación	Techo
Ambiente de instalación	Interiores
Fuente de luz	LED
Poder total	54 W
Flujo luminoso (fuente)	5001 lm
Voltage	220 - 240 V AC
Frequency	60 - 50 Hz
CCT / Tone	3000 K
Índice de rendimientos cromático	90 Ra
C.C. / C.V.	AC
Clase de aislamiento	1
IP	IP20
Test del hilo incandescente	850°
Montaje directo sobre superficies normalmente inflamables	Sí
CE	Sí
Driver incluido.	driver
Artículo regulable	Phase cut
Orientabilidad	No
Basculación	No
Practicabilidad	No
Transitabilidad	No
Cable incluido.	Sí
Largo del cable	2000 m
Resinado	No
Tipología de emisión luminosa	Dos emisiones
Peso neto	6.6 Kg
Protección descargas electrostáticas	No
Protección contra sobretensiones	No

Acabado cuerpo	
Material	aluminio
Color	relieve blanco RAL 9003
Elaboración	Pintura
Acabado difusor	
Material	PC
Color	transparente
Acabado montura	
Material	metal
Color	relieve blanco RAL 9003
Elaboración	Pintura



Colgantes | 220-240 V | 165 topLED 49 W DC - 54 W AC | CRI 90
8526

Double emission pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 165 topLED LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 5001 lm, with a 102.1 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a embossed white ral 9003 finish, processed by means of coating; the diffuser is made of PC; the mounting frame is made of metal, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 6.6 kg.

The total absorbed power is 44 W. The power supply cable is included and features a 2000 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Clase de eficiencia energética

Este producto contiene 3 fuentes de luz de clase de eficiencia energética F.

Características Luminotécnicas


Light Output Ratio (LOR)	92 %
Flujo luminoso (fuente)	5001 lm
Flujo luminoso de luminaria	4610 lm
Consumption	54 W
Rendimiento luminoso de las luminarias	85 lm/W
Temperatura de color	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Índice de rendimientos cromático	90 Ra
Temperatura de unión (luminaria)	80
Temperatura estándar del ambiente de servicio	25°C

LED Life / Failure Ratio

L70 B20 C0 72500h (at Tj 115 Ta 25)


OPTICAL

Óptica C0/C180	110°
Light distribution symmetry	Symmetrical

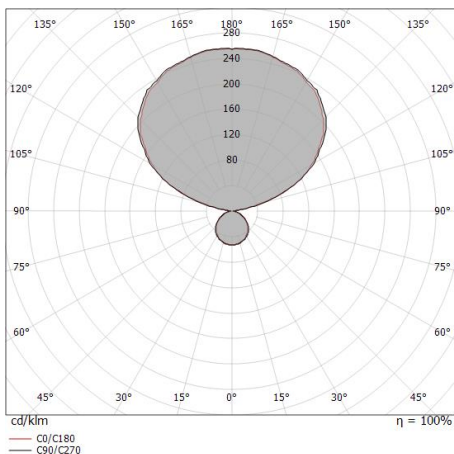



Quad_P7 | Pendant Luminaires | Accessories
8526



Dimmer
220-240V

Code
KIT0026



Dimmer
Radio-frequenza, 85-240V

Code
KIT0080