


# Tablet\_W2



Luminaria de pared | 220-240 V  
72 topLED 18 W DC - 22 W AC | CRI 80  
**7613**



| Datos técnicos  |                  |
|---|------------------|
| Año de realización  | 2016             |
| Tipo  | Superficie       |
| Posición de instalación                                   | Pared            |
| Ambiente de instalación                                   | Interiores       |
| Fuente de luz   | LED              |
| Óptica  | General Lighting |
| Light emission direction                                  | upward           |
| Potencia  | 18 W             |
| Flujo luminoso (fuente)                                   | 2360 lm          |
| Frequency   | 50 - 60 Hz       |
| CCT / Tone  | 3000 K           |
| Índice de rendimientos cromático                          | 80 Ra            |
| C.C. / C.V.   | AC               |
| Clase de aislamiento                                      | 1                |
| IP  | IP40             |
| Test del hilo incandescente                               | 850°             |
| Montaje directo sobre superficies normalmente inflamables | Sí               |
| CE  | Sí               |
| Driver incluido.  | driver           |
| Artículo regulable  | No               |
| Orientabilidad  | Orientabile      |
| ángulo total (plano vertical)                             | 0 °              |
| ángulo total (plano horizontal)                           | 350 °            |
| Basculación   | No               |
| Practicabilidad   | No               |
| Transitabilidad   | No               |
| Cable incluido.   | No               |
| Resinado  | No               |
| Tipología de emisión luminosa                             | Una emisión      |
| Peso neto   | 1.722 Kg         |
| Protección descargas electrostáticas                      | No               |
| Protección contra sobretensiones                          | No               |

| Acabado cuerpo  |                |
|-----------------|----------------|
| Material        | aluminio       |
| Color           | negro RAL 9005 |
| Elaboración     | Pintura        |
| Acabado difusor |                |
| Material        | PC             |
| Elaboración     | Arenado        |



Luminaria de pared | 220-240 V | 72 topLED 18 W DC - 22 W AC | CRI 80  
7613

Single emission wall lights for indoor application. The warm white LED light source with a general lighting light distribution is composed of 72 topped LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 2360 lm, with a 131.1 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a embossed black ral 9005 finish, processed by means of coating; the diffuser is made of PC with a sandblasting treatment. The ingress protection degree is IP40; the total weight is of 1.722 kg.

The total absorbed power is 19 W.

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

### Clase de eficiencia energética

Este producto contiene 2 fuentes de luz de clase de eficiencia energética D.

### Características Luminotécnicas

|   |                |
|---|----------------|
| Light Output Ratio (LOR)                      | 60 %           |
| Flujo luminoso (fuente)                       | 2360 lm        |
| Flujo luminoso de luminaria                   | 1437 lm        |
| Consumption                                   | 22 W           |
| Rendimiento luminoso de las luminarias        | 65 lm/W        |
| Temperatura de color                          | 3000 K         |
| Standard Deviation of Colour Matching         | 3 Step MacAdam |
| Índice de rendimientos cromático              | 80 Ra          |
| Temperatura de unión (luminaria)              | 80             |
| Temperatura estándar del ambiente de servicio | 25             |

### LED Life / Failure Ratio


L70 B20 C0 72500h

### UGR

|                   |          |
|-------------------|----------|
| UGR axial         | 26.4     |
| UGR transversal   | 26.4     |
| X=4H   Y=8H       | S=0.25H  |
| Reflection factor | 70/50/20 |

### OPTICAL

|                             |             |
|-----------------------------|-------------|
| Light distribution symmetry | Symmetrical |
| Óptica C0/C180              | 116°        |

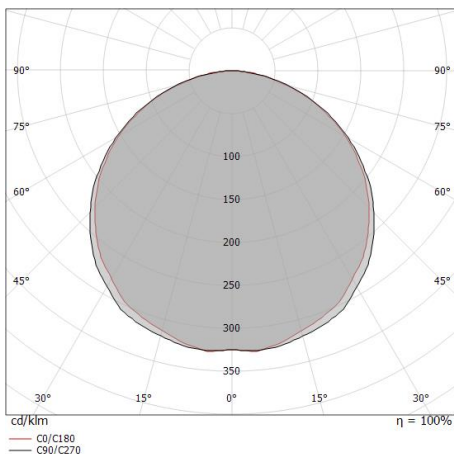

| Distance [m] | Cone diameter [m] | illuminance [lx]                      |
|--------------|-------------------|---------------------------------------|
| 0.5          | 1.64<br>1.59      | E(0°) 1865<br>E(C90) 133<br>E(C0) 143 |
| 1.0          | 3.28<br>3.18      | E(0°) 466<br>E(C90) 33<br>E(C0) 36    |
| 1.5          | 4.91<br>4.76      | E(0°) 207<br>E(C90) 15<br>E(C0) 16    |
| 2.0          | 6.55<br>6.35      | E(0°) 117<br>E(C90) 8<br>E(C0) 9      |
| 2.5          | 8.19<br>7.94      | E(0°) 75<br>E(C90) 5<br>E(C0) 6       |
| 3.0          | 9.83<br>9.53      | E(0°) 52<br>E(C90) 4<br>E(C0) 4       |

— C0/C180 (Half-peak divergence: 115.6°)  
- - C90/C270 (Half-peak divergence: 117.2°)



Soporte

L=360mm, H=5mm, D=50mm.

Material:aluminio, color:negro RAL 9005, elaboración :Pintura.

**Finish**

Black

**Code**

KIT0047