Luna

Colgantes | 220-240 V | 1 topLED 25 W DC - 27 W AC
CRI 90
9703

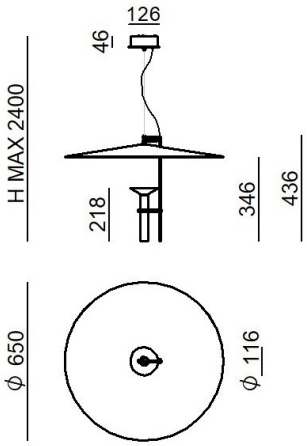

Datos técnicos	
Posición de instalación	Techo
Ambiente de instalación	Interiores
Fuente de luz	LED
Circuit structure	topLED
Óptica	Difusa
Light emission direction	downward
Potencia nominal	25 W DC
Poder total	27 W
Flujo luminoso (fuente)	3015 lm
Voltage	220 - 240 V AC
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Índice de rendimientos cromático	90 Ra
C.C. / C.V.	AC
Clase de aislamiento	1
IP	IP20
Test del hilo incandescente	850°
Montaje directo sobre superficies normalmente inflamables	Sí
CE	Sí
Driver incluido.	driver
Artículo regulable	DALI-2 - PUSH DIM
Orientabilidad	No
Basculación	No
Practicabilidad	No
Transitabilidad	No
Cable incluido.	Sí
Largo del cable	2 m
Resinado	No
Tipología de emisión luminosa	Dos emisiones
Peso neto	3,080 Kg
Protección descargas electrostáticas	No
Protección contra sobretensiones	No

Acabado cuerpo	
Material	Hierro
Color	Blanco
Elaboración	Pintura

Acabado difusor	
Material	aluminio
Color	Blanco
Elaboración	Pintura

Acabado montura	
Material	Hierro
Color	Blanco RAL 9003 opaco
Elaboración	Pintura

Cables Colgantes	
Longitud máxima de	2000 mm

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Luna

Colgantes | 220-240 V | 1 topLED 25 W DC - 27 W AC | CRI 90
9703

Double emission pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 1 topled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3015 lm, with a 120.6 lm/W nominal luminous efficacy.

The device body is made of iron and features a white finish, processed by means of coating; the diffuser is made of aluminium with a coating treatment; the mounting frame is made of iron, with a white ral 9003 matt finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 3,080 kg.

The total absorbed power is 27 W. The power supply cable is included and features a 2 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Características Luminotécnicas	
Light Output Ratio (LOR)	53 %
Flujo luminoso (fuente)	3015 lm
Flujo luminoso de luminaria	1623 lm
Consumption	27 W
Rendimiento luminoso de las luminarias	60 lm/W
Temperatura de color	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Índice de rendimientos cromático	90 Ra
Temperatura de unión (luminaria)	80
Temperatura estándar del ambiente de servicio	25°C

LED Life / Failure Ratio
L80 B20 C0 61000h (at Tj 105 Ta 25)

UGR	
UGR axial	18.2
UGR transversal	18.2
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Óptica C0/C180	128°
Light distribution simmetry	Symmetrical

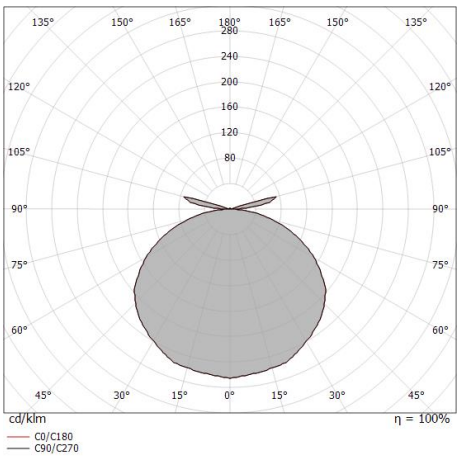

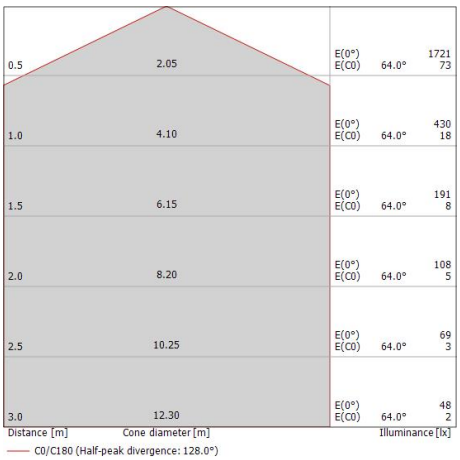

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.