




Wall Lights | 220-240 V  
60 topLED 24 W DC - 28 W AC | CRI 90  
**9780M**

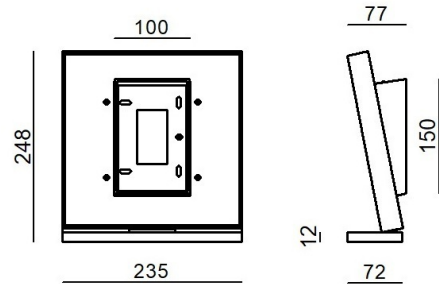

Technical data	
Installation position	Wall lights
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	upward
Nominal power	24 W DC
Total Power	28 W
Source lumens	3490 lm
Voltage	220 - 240 V AC
Frequency	50 - 60 Hz
CCT / Tone	2700 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	Phase cut
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	1.950 Kg
Electrostatic discharge protection	No
Surge protection	No

### Finishing casing

Material	Aluminium
Colour	White
Processing	Coating

### Finishing diffuser

Material	PC
Colour	transparent

### Finishing mounting frame

Material	Aluminium
Colour	White
Processing	Coating

Wall Lights | 220-240 V | 60 topLED 24 W DC - 28 W AC | CRI 90 | Base  
**9780M**

Single emission wall lights for indoor application. The super warm LED light source with a diffused light distribution is composed of 60 topLED LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 3490 lm, with a 145.4 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a white finish, processed by means of coating; the diffuser is made of PC; the mounting frame is made of aluminium, with a white finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 1.950 kg.

The total absorbed power is 28 W.

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

### Illuminotechnical Features

Light Output Ratio (LOR)	75 %
Source lumens	3490 lm
Delivered lumens	2622 lm
Consumption	28 W
Luminaire efficacy	93 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25°C

### LED Life / Failure Ratio

L70 B20 C0 72500h (at Tj 115 Ta 25 )

