




Wall Lights | 220-240 V
60 topLED 24 W DC - 28 W AC | CRI 90
9782M

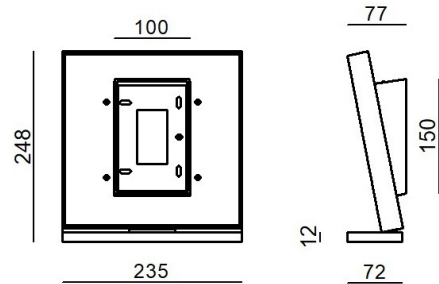

| Technical data | |
|--|-----------------|
| Type | - V |
| Installation position | Wall lights |
| Installation environment | Indoor |
| Light Source | LED |
| Circuit structure | topLED |
| Optics | Diffused |
| Light emission direction | upward |
| Nominal power | 24 W DC |
| Total Power | 28 W |
| Source lumens | 3490 lm |
| Voltage | 220 - 240 V AC |
| Frequency | 50 - 60 Hz |
| CCT / Tone | 2700 K |
| Colour rendering index | 90 Ra |
| C.C. / C.V. | AC |
| Safety class | 1 |
| IP | IP20 |
| Glow wire test | 850° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| Driver included | Driver |
| Dimmable article | Phase cut |
| Directional | No |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | No |
| Resin potting | No |
| Type of light emission | Single emission |
| Net weight | 1.950 Kg |
| Electrostatic discharge protection | No |
| Surge protection | No |

| Finishing casing | |
|--------------------------|-------------|
| Material | Aluminium |
| Finishing diffuser | |
| Material | PC |
| Colour | transparent |
| Finishing mounting frame | |
| Material | Aluminium |
| Colour | White |
| Processing | Coating |

Wall Lights | 220-240 V | 60 topLED 24 W DC - 28 W AC | CRI 90 | Base
9782M

Single emission wall lights for indoor application. The super warm LED light source with a diffused light distribution is composed of 60 topLED LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 3490 lm, with a 145.4 lm/W nominal luminous efficacy.

The device body is made of aluminium; the diffuser is made of PC; the mounting frame is made of aluminium, with a white finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 1.950 kg.

The total absorbed power is 28 W.

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Features

| | |
|---|----------------|
| Light Output Ratio (LOR) | 75 % |
| Source lumens | 3490 lm |
| Delivered lumens | 2622 lm |
| Consumption | 28 W |
| Luminaire efficacy | 93 lm/W |
| Colour temperature | 2700 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Colour rendering index | 90 Ra |
| Junction temperature (lighting fixture) | 80 |
| Standard Operating Ambient Temperature | 25°C |

LED Life / Failure Ratio

L70 B20 C0 72500h (at Tj 115 Ta 25)

