




Pendant Luminaires | 220-240 V | 4x2G11
6858

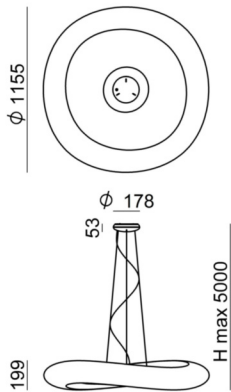

Technical data	
Construction year	2010
Type	Surface
Installation position	Ceiling
Installation environment	Indoor
Power	4 x 36 W
Lamp cap	4 x 2G11
Frequency	50 - 60 Hz
Optics	General Lighting
Light emission direction	downward and upward
Safety class	1
IP	IP20
Optical compartment IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	5 m
Resin potting	No
Net weight	12.000 Kg

Finishing casing	
Material	Aluminium
Colour	embossed white RAL 9003
Processing	Coating

Finishing diffuser	
Material	PE
Colour	neutral

Pendant Luminaires | 220-240 V | 4x2G11 | Base
6858

Double emission pendant luminaires for indoor application. Fluorescent lamp included 36W, lamp cap 4x2G11.

The device body is made of aluminium and features a embossed white ral 9003 finish, processed by means of coating; the diffuser is made of pe. The ingress protection degree is IP20; the total weight is of 12.000 kg.

. The power supply cable is included and features a 5 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Features	
Light Output Ratio (LOR)	88 %
Source lumens	11600 lm
Delivered lumens	10219 lm
Consumption	136 W
Luminaire efficacy	85 lm/W
Colour temperature	3000 K
Colour rendering index	80 Ra
UGR	
UGR axial	< 16
UGR transversal	< 16
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
OPTICAL	
Light distribution simmetry	Symmetrical 2
C0/C180 optics	122°
C90/C270 optics	116°

