


Pendant Luminaires | 220-240 V | 1x2GX13
6860

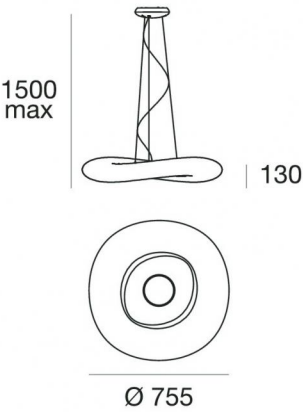

Technical data	
Construction year	2010
Type	Surface
Installation position	Ceiling
Installation environment	Indoor
Lamp cap	1 x 2GX13
Light emission direction	downward and upward
Frequency	50 - 60 Hz
Optics	Diffused
Safety class	1
IP	IP20
Optical compartment IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1.8 m
Resin potting	No
Net weight	6.000 Kg

Finishing casing	
Material	Aluminium
Colour	White
Processing	Coating

Finishing diffuser	
Material	PE
Colour	neutral

Pendant Luminaires | 220-240 V | 1x2GX13 | Base
6860

Double emission pendant luminaires for indoor application. Fluorescent lamp included 55W, lamp cap 1x2GX13.

The device body is made of aluminium and features a white finish, processed by means of coating; the diffuser is made of pe. The ingress protection degree is IP20; the total weight is of 6.000 kg.

. The power supply cable is included and features a 1.8 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class G.

Illuminotechnical Features

Light Output Ratio (LOR)	88 %
Source lumens	4200 lm
Delivered lumens	3700 lm
Consumption	59 W
Luminaire efficacy	71 lm/W
Colour temperature	3000 K
Colour rendering index	80 Ra

UGR

UGR axial	14.4
UGR transversal	15.1
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C90/C270 optics	116°
C0/C180 optics	122°
Light distribution simmetry	Symmetrical 2 assis

