


Tablet_W1



Wall Lights | 220-240 V
16 topLED 4 W DC - 5 W AC | CRI 80
7600



Technical data	
Construction year	2014
Type	Surface
Installation position	Wall lights
Installation environment	Indoor
Light Source	LED
Optics	Diffused
Light emission direction	upward
Nominal power	4 W DC
Total Power	5 W
Source lumens	534 lm
Voltage	220 - 240 V AC
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP40
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	Swivelling
total angle (vertical plane)	0 °
total angle (horizontal plane)	350 °
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	0.674 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing	
Material	Aluminium
Colour	Embossed white RAL 9003
Processing	Coating

Finishing diffuser	
Material	PC
Processing	Sandblasting

Wall Lights | 220-240 V | 16 topLED 4 W DC - 5 W AC | CRI 80 | Base 7600

Single emission wall lights for indoor application. The warm white LED light source with a diffused light distribution is composed of 16 topped LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 534 lm, with a 133.5 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a embossed white ral 9003 finish, processed by means of coating; the diffuser is made of PC with a sandblasting treatment. The ingress protection degree is IP40; the total weight is of 0.674 kg.

The total absorbed power is 5 W.

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class	
This product contains a light source of energy efficiency class E.	
Illuminotechnical Features	
Light Output Ratio (LOR)	83 %
Source lumens	534 lm
Delivered lumens	444 lm
Consumption	4.9 W
Luminaire efficacy	90 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25°C
LED Life / Failure Ratio	
L70 B20 C0 72500h	

Wall Lights | 220-240 V | 16 topLED 4 W DC - 5 W AC | CRI 80 | Base 7600


Single emission wall lights for indoor application. The warm white LED light source with a diffused light distribution is composed of 16 topLED LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 534 lm, with a 133.5 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a embossed white ral 9003 finish, processed by means of coating; the diffuser is made of PC with a sandblasting treatment. The ingress protection degree is IP40; the total weight is of 0.674 kg.

The total absorbed power is 5 W.

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

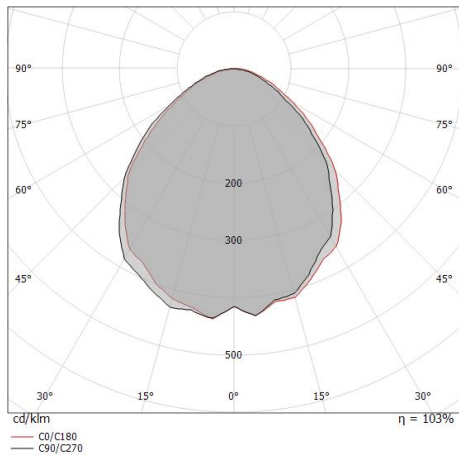

Energy efficiency class

This product contains a light source of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	71 %
Source lumens	534 lm
Delivered lumens	383 lm
Consumption	5 W
Luminaire efficacy	76 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Junction temperature (lighting fixture)	80

Standard Operating Ambient Temperature

25°C

LED Life / Failure Ratio

L70 B20 C0 72500h

UGR

UGR axial	18.2
UGR transversal	19.8
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C0/C180 optics	115°
Light distribution simmetry	Symmetrical



Tablet_W1 | Wall Lights | Accessories
7600



Bracket
L=163mm, H=5mm, D=50mm

Code
Kit 80