





Colgantes | 220-240 V | 3 topLED 7 W DC - 7 W AC  
CRI 90

8642



| Datos técnicos                                            |                |
|-----------------------------------------------------------|----------------|
| Designer                                                  | Davide Oppizzi |
| Año de realización                                        | 2018           |
| Tipo                                                      | Superficie     |
| Posición de instalación                                   | Techo          |
| Ambiente de instalación                                   | Interiores     |
| Fuente de luz                                             | LED            |
| Poder total                                               | 7 W            |
| Flujo luminoso (fuente)                                   | 540 lm         |
| Voltage                                                   | 220 - 240 V AC |
| Frequency                                                 | 60 - 50 Hz     |
| CCT / Tone                                                | 3000 K         |
| Índice de rendimientos cromático                          | 90 Ra          |
| C.C. / C.V.                                               | AC             |
| Clase de aislamiento                                      | 1              |
| IP                                                        | IP20           |
| Test del hilo incandescente                               | 850°           |
| Montaje directo sobre superficies normalmente inflamables | Sí             |
| CE                                                        | Sí             |
| Driver incluido.                                          | driver         |
| Artículo regulable                                        | Phase cut      |
| Orientabilidad                                            | No             |
| Basculación                                               | No             |
| Practicabilidad                                           | No             |
| Transitabilidad                                           | No             |
| Cable incluido.                                           | Sí             |
| Largo del cable                                           | 3 m            |
| Resinado                                                  | No             |
| Tipología de emisión luminosa                             | Una emisión    |
| Peso neto                                                 | 1.175 Kg       |
| Protección descargas electrostáticas                      | No             |
| Protección contra sobretensiones                          | No             |

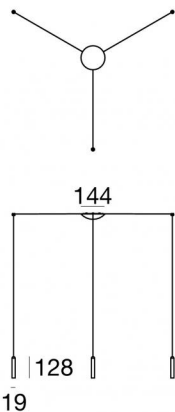

| Acabado cuerpo  |                         |
|-----------------|-------------------------|
| Material        | aluminio                |
| Color           | cobre                   |
| Elaboración     | Galvanostegia           |
| Acabado difusor |                         |
| Material        | PC                      |
| Color           | transparente            |
| Acabado montura |                         |
| Material        | metal                   |
| Color           | relieve blanco RAL 9003 |
| Elaboración     | Pintura                 |

Colgantes | 220-240 V | 3 topLED 7 W DC - 7 W AC | CRI 90  
8642



Single emission pendant luminaires for indoor application. The warm white LED light source with a wide flood light distribution is composed of 3 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 540 lm, with a 77.1 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a copper finish, processed by means of electroplating; the diffuser is made of PC; the mounting frame is made of metal, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 1.175 kg.

The total absorbed power is 7 W. The power supply cable is included and features a 3 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

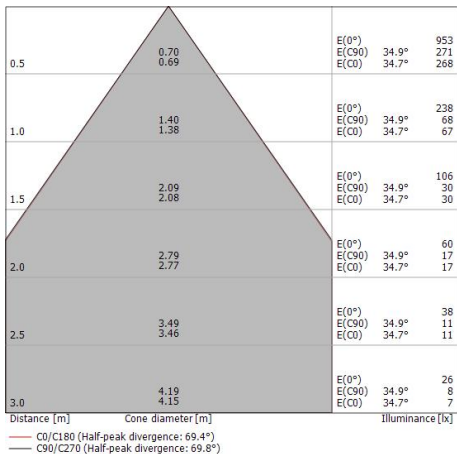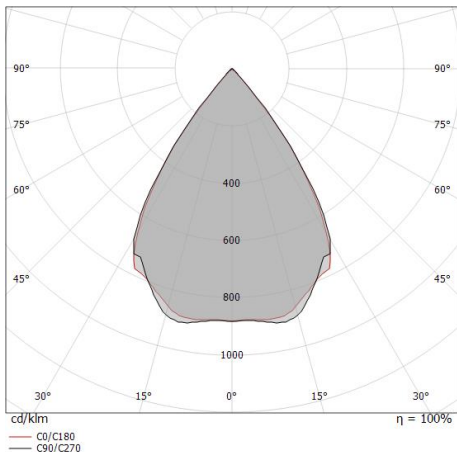


| Clase de eficiencia energética                                               |  |
|------------------------------------------------------------------------------|--|
| Este producto contiene 3 fuentes de luz de clase de eficiencia energética G. |  |

| Características Luminotécnicas                |                |
|-----------------------------------------------|----------------|
| Light Output Ratio (LOR)                      | 50 %           |
| Flujo luminoso (fuente)                       | 540 lm         |
| Flujo luminoso de luminaria                   | 270 lm         |
| Consumption                                   | 7 W            |
| Rendimiento luminoso de las luminarias        | 38 lm/W        |
| Temperatura de color                          | 3000 K         |
| Standard Deviation of Colour Matching         | 3 Step MacAdam |
| Índice de rendimientos cromático              | 90 Ra          |
| Temperatura de unión (luminaria)              | 80             |
|                                               |                |
| Temperatura estándar del ambiente de servicio | 25°C           |

| LED Life / Failure Ratio |  |
|--------------------------|--|
| L70 B20 C0 72500h        |  |

| UGR               |          |
|-------------------|----------|
| UGR axial         | 29.4     |
| UGR transversal   | 29.4     |
| X=4H   Y=8H       | S=0.25H  |
| Reflection factor | 70/50/20 |

| OPTICAL                     |             |
|-----------------------------|-------------|
| Óptica C0/C180              | 69°         |
| Light distribution simmetry | Symmetrical |



Dimmer  
220-240V

Code  
KIT0026



Dimmer  
Radio-frequenza, 85-240V

Code  
KIT0080