


Colgantes | 220-240 V
84 topLED 29 W DC - 33 W AC | CRI 90
8892



Datos técnicos	
Designer	Mirco Crosatto
Año de realización	2019
Tipo	Superficie
Posición de instalación	Techo
Ambiente de instalación	Interiores
Fuente de luz	LED
Circuit structure	topLED
Óptica	Difusa
Light emission direction	downward and upward
Potencia nominal	29 W DC
Poder total	33 W
Flujo luminoso (fuente)	3748 lm
Voltage	220 - 240 V AC
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Índice de rendimientos cromático	90 Ra
C.C. / C.V.	AC
Clase de aislamiento	1
IP	IP20
Test del hilo incandescente	650°
Montaje directo sobre superficies normalmente inflamables	Sí
CE	Sí
Driver incluido.	driver
Artículo regulable	Phase cut
Orientabilidad	No
Basculación	No
Practicabilidad	No
Transitabilidad	No
Cable incluido.	Sí
Largo del cable	2.5 m
Resinado	No
Tipología de emisión luminosa	Dos emisiones
Peso neto	4,1 Kg
Protección descargas electrostáticas	No
Protección contra sobretensiones	No
Tecnología óptica	Optilight TM

EAC
 CE
 


 C.C.
 
 IP20
 

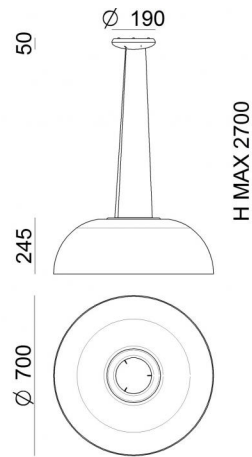Acabado cuerpo	
Material	Aluminio fundido
Color	Blanco
Elaboración	Recubrimiento en polvo
Acabado difusor	
Color	transparente
Acabado montura	
Material	metal
Color	Blanco
Elaboración	Pintura
Cables Colgantes	
Longitud máxima de	2500 mm

Colgantes | 220-240 V | 84 topLED 29 W DC - 33 W AC | CRI 90
8892



Double emission pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 84 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3748 lm, with a 129.2 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium and features a white finish, processed by means of powder coating; the diffuser is made with a laser engravings treatment; the mounting frame is made of metal, with a white finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 4,1 kg.

The total absorbed power is 33 W. The power supply cable is included and features a 2.5 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

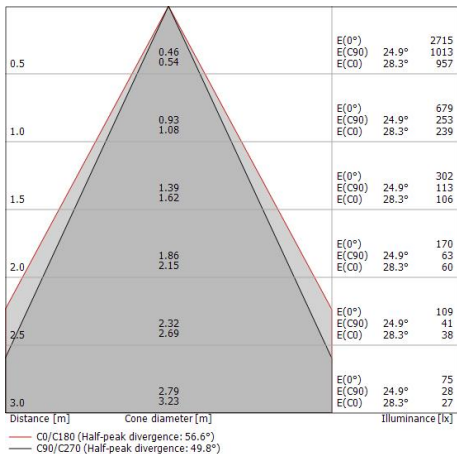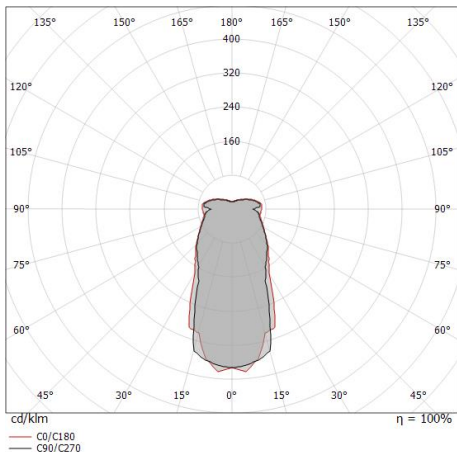

Clase de eficiencia energética	
Este producto contiene 3 fuentes de luz de clase de eficiencia energética E.	


Características Luminotécnicas	
Light Output Ratio (LOR)	48 %
Flujo luminoso (fuente)	3748 lm
Flujo luminoso de luminaria	1815 lm
Consumption	33 W
Rendimiento luminoso de las luminarias	55 lm/W
Temperatura de color	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Índice de rendimientos cromático	90 Ra
Temperatura de unión (luminaria)	80
Temperatura estándar del ambiente de servicio	25°C

LED Life / Failure Ratio	
L70 B20 C0 72500h (at Tj 115 Ta 25)	

UGR	
UGR axial	16.9
UGR transversal	17.1
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Óptica C90/C270	50°
Óptica C0/C180	57°
Light distribution simmetry	Symmetrical 2 assis



		Dimmer 220-240V	Code
			KIT0026

		Dimmer Radio-frequenza, 85-240V	Code
			KIT0080