



Colgantes | 220-240 V
60 + 36 topLED 18 W DC - 21 W AC | CRI 90
8900

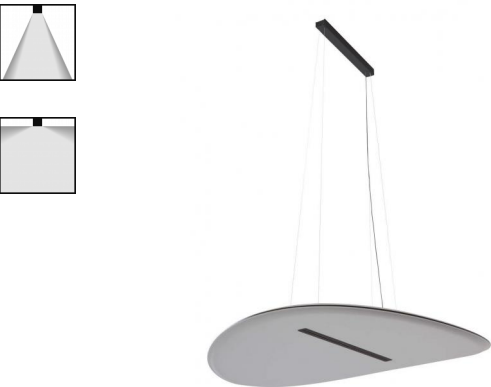

Datos técnicos	
Año de realización	2019
Tipo	Superficie
Posición de instalación	Techo
Ambiente de instalación	Interiores
Fuente de luz	LED
Poder total	21 W
Flujo luminoso (fuente)	1993 lm
Voltage	220 - 240 V AC
Frequency	60 - 50 Hz
CCT / Tone	3000 K
Índice de rendimientos cromático	90 Ra
C.C. / C.V.	AC
Clase de aislamiento	1
IP	IP20
Test del hilo incandescente	650°
Montaje directo sobre superficies normalmente inflamables	Sí
CE	Sí
Driver incluido.	driver
Artículo regulable	DALI
Orientabilidad	No
Basculación	Sí
ángulo total (plano horizontal)	70 °
Practicabilidad	No
Transitabilidad	No
Cable incluido.	Sí
Largo del cable	2.5 m
Resinado	No
Tipología de emisión luminosa	Dos emisiones
Peso neto	4,005 Kg
Protección descargas electrostáticas	No
Protección contra sobretensiones	No
Tecnología óptica	Dark light

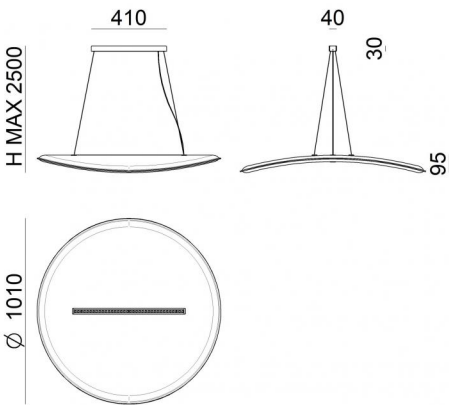

Acabado cuerpo	
Material	Pet
Color	gris
Acabado difusor	
Material	PC - aluminio
Color	opalino
Elaboración	Pintura
Acabado montura	
Material	metal
Elaboración	Pintura
Cables Colgantes	
Longitud máxima de	2500 mm

Colgantes | 220-240 V | 60 + 36 topLED 18 W DC - 21 W AC | CRI 90
8900



Double emission pendant luminaires for indoor application. The warm white LED light source with a medium flood light distribution is composed of 36 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 693 lm, with a 115.5 lm/W nominal luminous efficacy The warm white LED light source with a diffused light distribution is composed of 60 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 1300 lm, with a 108.3 lm/W nominal luminous efficacy.

The device body is made of pet and features a grey finish; the diffuser is made of PC; the diffuser is made of aluminium with a coating treatment; the mounting frame is made of metal, with a 5g 9005 black finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 4,005 kg.

The total absorbed power is 21 W. The power supply cable is included and features a 2.5 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

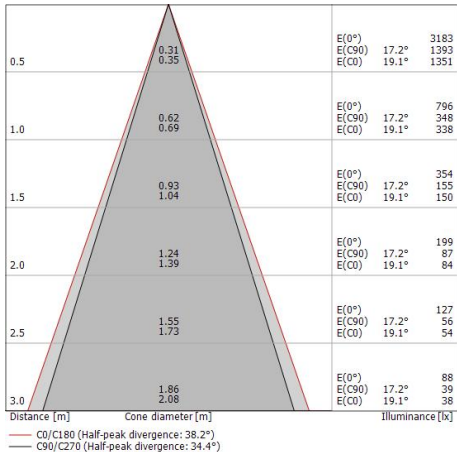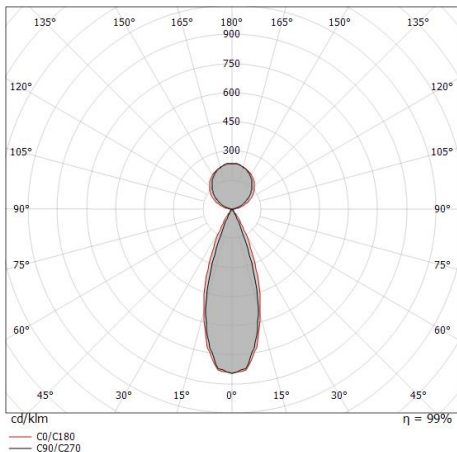

Clase de eficiencia energética	
Este producto contiene 3 fuentes de luz de clase de eficiencia energética F.	

Características Luminotécnicas	
Light Output Ratio (LOR)	47 %
Flujo luminoso (fuente)	1993 lm
Flujo luminoso de luminaria	942 lm
Consumption	21 W
Rendimiento luminoso de las luminarias	44 lm/W
Temperatura de color	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Índice de rendimientos cromático	90 Ra
Temperatura de unión (luminaria)	80
Temperatura estándar del ambiente de servicio	25°C

LED Life / Failure Ratio	
L70 B20 C0 72500h (at Tj 115 Ta 25)	

UGR	
UGR axial	-3.5
UGR transversal	3.3
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Óptica C90/C270	34°
Óptica C0/C180	38°
Light distribution simmetry	Symmetrical 2 assis



Dimmer
Bluetooth, 220-240V

Code
KIT0079