


Derby_P



Pendelleuchte | 220-240 V
60 topLED 24 W DC - 28 W AC | CRI 90
8907

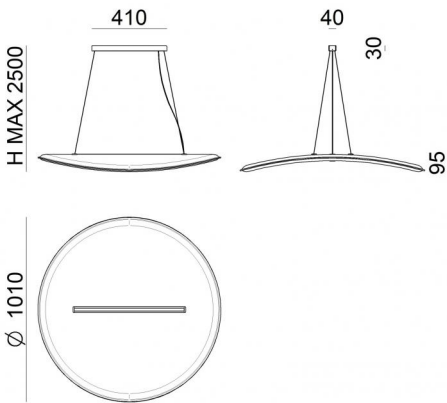

Technische Daten	
Jahr der Verwirklichung	2019
Typ	Oberfläche
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Gesamtleistung	28 W
Lichtstrom (Lichtquelle)	2648 lm
Voltage	220 - 240 V AC
Frequency	60 - 50 Hz
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP20
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	DALI
Schwenkbarkeit	Nein
Drehbarkeit	Ja
Gesamtwinkel (horizontale Ebene)	70 °
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	2.5 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Zweiflammig
Nettogewicht	4,005 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Gehäuse	
Material	Pet
Farbe	weiß-orange
Oberfläche Diffusor	
Material	PC - Aluminium
Farbe	Opal
Bearbeitungstyp	Lackierung
Oberfläche Fassung	
Material	Metall
Bearbeitungstyp	Lackierung
Cables Pendelleuchte	
Max. Kabellänge	2500 mm

Pendelleuchte | 220-240 V | 60 topLED 24 W DC - 28 W AC | CRI 90
8907



Double emission pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 60 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2648 lm, with a 110.3 lm/W nominal luminous efficacy.

The device body is made of pet and features a white-orange finish; the diffuser is made of PC; the diffuser is made of aluminium with a coating treatment; the mounting frame is made of metal, with a 5g 9005 black finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 4,005 kg.

The total absorbed power is 28 W. The power supply cable is included and features a 2.5 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

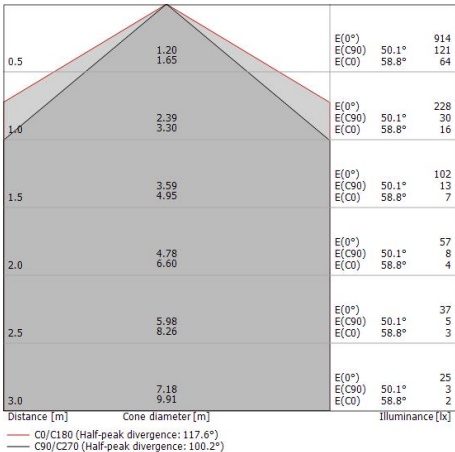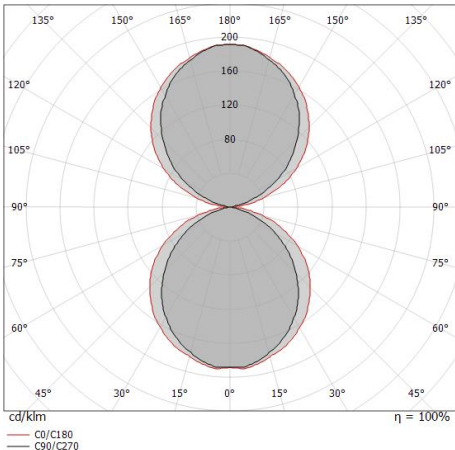

Energieeffizienzklasse

Dieses Produkt enthält 4 Lichtquellen der Energieeffizienzklasse F.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	45 %
Lichtstrom (Lichtquelle)	2648 lm
Leuchten Lichtstrom	1211 lm
Consumption	28 W
Leuchten Lichtausbeute	43 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80

Standardumgebungstemperatur 25°C

LED Life / Failure Ratio

L70 B20 C0 72500h (at Tj 115 Ta 25)


UGR

UGR axial	22
UGR transversal	25.4
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Optik C90/C270	100°
Optik C0/C180	118°
Light distribution simmetry	Symmetrical 2 assis

Derby_P | Pendant Luminaires | Accessories
8907



Dimmer
Bluetooth, 220-240V

Code
KIT0079