














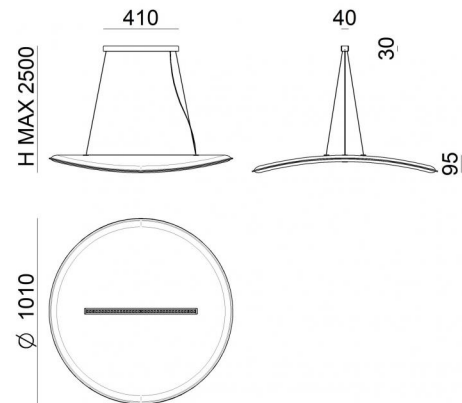

Matériau	Pet
Couleur	Blanche-Orange

Finition diffuseur	
Matériau	PC - Aluminium
Couleur	opalin
Fabrication	Vernissage

Matériau	métal
Fabrication	Vernissage

Longueur max de 2500 mm

Suspension | 220-240 V | 60 + 36 topLED 18 W DC - 21 W AC | CRI 90
8906



Double emission pendant luminaires for indoor application. The warm white LED light source with a flood light distribution is composed of 36 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 693 lm, with a 115.5 lm/W nominal luminous efficacy The warm white LED light source with a general lighting light distribution is composed of 60 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 1300 lm, with a 108.3 lm/W nominal luminous efficacy.

The device body is made of pet and features a white-orange finish; the diffuser is made of PC; the diffuser is made of aluminium with a coating treatment; the mounting frame is made of metal, with a 5g 9005 black finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 4,005 kg.

The total absorbed power is 21 W. The power supply cable is included and features a 2.5 m lenght.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

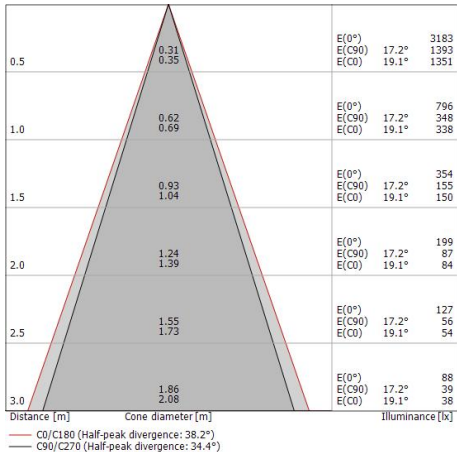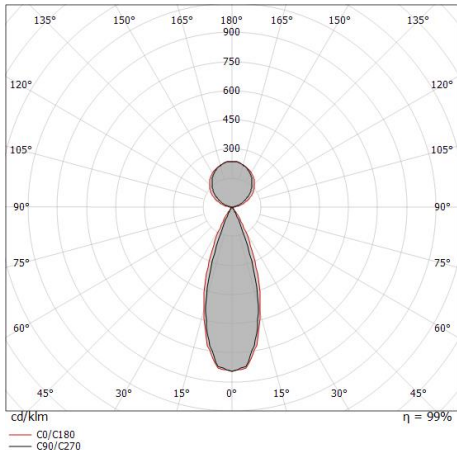

Classe d'efficacité énergétique

Caractéristiques Techniques de l'éclairage

Light Output Ratio (LOR)	47 %
Flux lumineux (source)	1993 lm
Flux lumineux du luminaire	942 lm
Consumption	21 W
Efficacité lumineuse du luminaire	44 lm/W
Température de couleur	3000 K
Standards de Concordance de Couleur	3 Step MacAdam
Indice de rendu chromatique	90 Ra
Température de jonction (appareil)	80

Température standard de l'environnement de	25°C
--	------

LED Life / Failure Ratio

L70 B20 C0 72500h (at Tj 115 Ta 25)


UGR

UGR axial	-3.5
UGR transversal	3.3
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Light distribution simmetry	Symmetrical 2 assis
Optique C0/C180	38°
Optique C90/C270	34°

Derby_P | Pendant Luminaires | Accessories
8906



Variateur
Bluetooth, 220-240V

Code
KIT0079