


Colgantes | 220-240 V
300 topLED 40 W AC - 48 W AC | CRI 85
7118

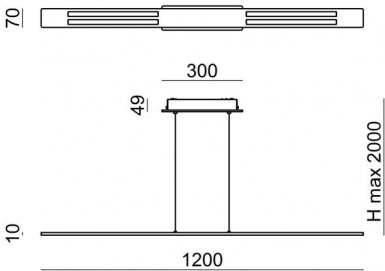

Datos técnicos	
Año de realización	2012
Tipo	Superficie
Posición de instalación	Techo
Ambiente de instalación	Interiores
Fuente de luz	LED
Poder total	48 W
Flujo luminoso (fuente)	3236 lm
Voltage	220 - 240 V AC
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Índice de rendimientos cromático	85 Ra
C.C. / C.V.	AC
Clase de aislamiento	1
IP	IP40
Test del hilo incandescente	850°
Montaje directo sobre superficies normalmente inflamables	Sí
CE	Sí
Driver incluido.	driver
Artículo regulable	No
Orientabilidad	No
Basculación	No
Practicabilidad	No
Transitabilidad	No
Cable incluido.	Sí
Largo del cable	2 m
Resinado	No
Tipología de emisión luminosa	Dos emisiones
Peso neto	4.3 Kg
Protección descargas electrostáticas	No
Protección contra sobretensiones	No

Acabado cuerpo	
Material	aluminio
Color	relieve blanco RAL 9003
Elaboración	Pintura
Acabado difusor	
Material	PC
Color	opalino
Acabado montura	
Material	metal
Color	relieve blanco RAL 9003
Elaboración	Pintura
Cables Electrification+suspension	
Longitud máxima de	2000 mm

Colgantes | 220-240 V | 300 topLED 40 W AC - 48 W AC | CRI 85
7118


Double emission pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 300 topLED LEDs with CCT of 3000 K and a CRI 85; the source luminous flux is 3236 lm, with a 80.9 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a embossed white ral 9003 finish, processed by means of coating; the diffuser is made of PC; the mounting frame is made of metal, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP40; the total weight is of 4.3 kg.

The total absorbed power is 48 W. The power supply cable is included and features a 2 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

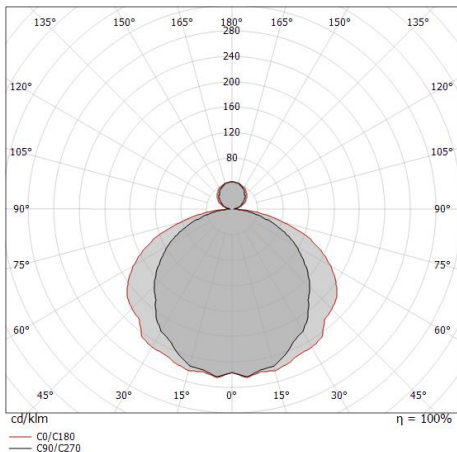

0.5	1.47 2.58	E(0°) E(C90) E(C0)	55.8° 68.8°	1881 173 46
1.0	2.94 5.16	E(0°) E(C90) E(C0)	55.8° 68.8°	470 43 12
1.5	4.41 7.73	E(0°) E(C90) E(C0)	55.8° 68.8°	209 19 5
2.0	5.89 10.31	E(0°) E(C90) E(C0)	55.8° 68.8°	118 11 3
2.5	7.36 12.89	E(0°) E(C90) E(C0)	55.8° 68.8°	75 7 2
3.0	8.83 15.47	E(0°) E(C90) E(C0)	55.8° 68.8°	52 5 1

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 137.6°)
— C90/C270 (Half-peak divergence: 111.6°)

Clase de eficiencia energética	
Este producto contiene 5 fuentes de luz de clase de eficiencia energética F.	

Características Luminotécnicas	
Light Output Ratio (LOR)	56 %
Flujo luminoso (fuente)	3236 lm
Flujo luminoso de luminaria	1836 lm
Consumption	48 W
Rendimiento luminoso de las luminarias	38 lm/W
Temperatura de color	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Índice de rendimientos cromático	85 Ra
Temperatura de unión (luminaria)	80
Temperatura estándar del ambiente de servicio	25°C

LED Life / Failure Ratio	
L80 B20 C0 80000h	

UGR	
UGR axial	11.8
UGR transversal	19.4
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Óptica C90/C270	112°
Óptica C0/C180	138°
Light distribution simmetry	Symmetrical 2 assis