


Luminaria de pie | 220-240 V
104 topLED 19 W DC - 23 W AC | CRI 90
8009

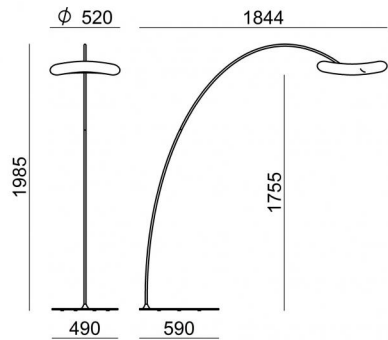

Datos técnicos	
Año de realización	2018
Tipo	Luminaria de pie
Posición de instalación	Piso
Ambiente de instalación	Interiores
Fuente de luz	LED
Circuit structure	topLED
Óptica	Difusa
Light emission direction	downward and upward
Potencia nominal	19 W DC
Poder total	23 W
Flujo luminoso (fuente)	2189 lm
Voltage	220 - 240 V AC
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Índice de rendimientos cromático	90 Ra
C.C. / C.V.	AC
Clase de aislamiento	1
IP	IP20
IP vano óptico	IP40
Test del hilo incandescente	650°
Montaje directo sobre superficies normalmente inflamables	Sí
CE	Sí
Driver incluido.	driver
Artículo regulable	DALI - PUSH DIM
Orientabilidad	No
Basculación	No
Practicabilidad	No
Transitabilidad	No
Cable incluido.	Sí
Enchufe eléctrico	Type F+E
Largo del cable	4 m
Resinado	No
Tipología de emisión luminosa	Dos emisiones
Peso neto	18,64 Kg
Protección descargas electrostáticas	No
Protección contra sobretensiones	No

Acabado cuerpo	
Material	metal
Color	Blanco
Elaboración	Pintura
Acabado difusor	
Material	PE
Color	neutral
Acabado montura	
Material	metal
Color	Blanco
Elaboración	Pintura

Luminaria de pie | 220-240 V | 104 topLED 19 W DC - 23 W AC | CRI 90
8009



Double emission floor lamp for indoor application. The warm white LED light source with a diffused light distribution is composed of 104 topLED LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2189 lm, with a 115.2 lm/W nominal luminous efficacy.

The device body is made of metal and features a white finish, processed by means of coating; the diffuser is made of pe; the mounting frame is made of metal, with a white finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 18,64 kg.

The total absorbed power is 23 W. The power supply cable is included and features a 4 m length.

The device features protection class I and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

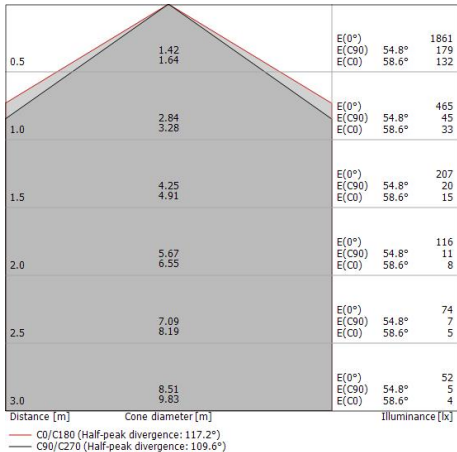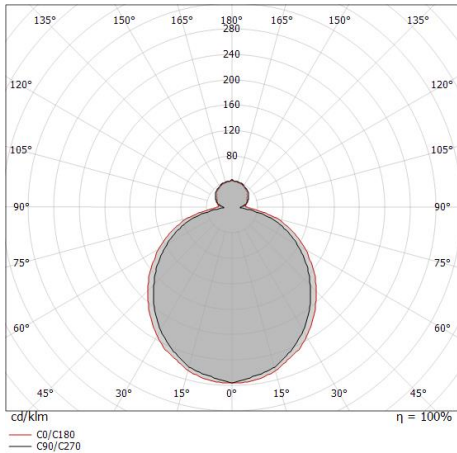

Clase de eficiencia energética

Este producto contiene una fuente de luz de clase de eficiencia energética F.

Características Luminotécnicas

Light Output Ratio (LOR)	76 %
Flujo luminoso (fuente)	2189 lm
Flujo luminoso de luminaria	1684 lm
Consumption	23 W
Rendimiento luminoso de las luminarias	73 lm/W
Temperatura de color	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Índice de rendimientos cromático	90 Ra

LED Life / Failure Ratio

L80 B20 C0 80000h

UGR

UGR axial	14.5
UGR transversal	15.6
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Óptica C90/C270	110°
Óptica C0/C180	117°
Light distribution simmetry	Symmetrical 2 assis