



Mongolfier_P3



Pendelleuchte | 220-240 V
1 arrayLED 24 W DC - 28 W AC | CRI 90 | Warm Tune
8148



Technische Daten	
Jahr der Verwirklichung	2018
Typ	Oberfläche
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Gesamtleistung	28 W
Lichtstrom (Lichtquelle)	2100 lm
Voltage	220 - 240 V AC
Frequency	60 - 50 Hz
Ähnlichste Farbtemperatur / Tone	Warm Tune
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP20
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Phase cut
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehrbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	2 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	4.6 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

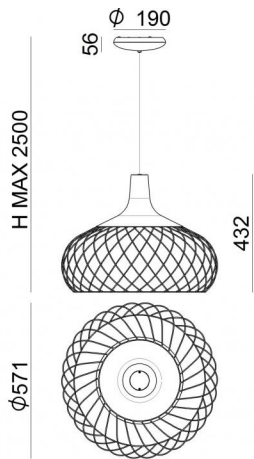

Oberfläche Gehäuse	
Material	Metall
Farbe	Kupfer
Bearbeitungstyp	Tampongalvanisieren
Oberfläche Diffusor	
Material	PMMA
Bearbeitungstyp	Satinieren
Oberfläche Fassung	
Material	Metall
Farbe	Kupfer
Bearbeitungstyp	Tampongalvanisieren
Cables Pendelleuchte	
Max. Kabellänge	2000 mm

Pendelleuchte | 220-240 V | 1 arrayLED 24 W DC - 28 W AC | CRI 90 | Warm Tune
8148



Single emission pendant luminaires for indoor application. The warm tune LED light source with a diffused light distribution is composed of 1 arrayed LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2100 lm, with a 87.5 lm/W nominal luminous efficacy.

The device body is made of metal and features a copper finish, processed by means of electroplating; the diffuser is made of pmma with a satin finishing treatment; the mounting frame is made of metal, with a copper finish, processed by means of electroplating. The ingress protection degree is IP20; the total weight is of 4.6 kg.

The total absorbed power is 28 W. The power supply cable is included and features a 2 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

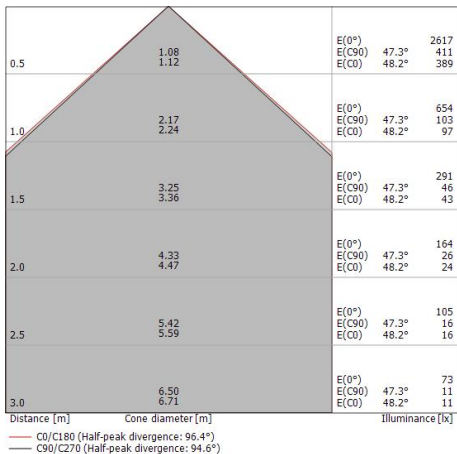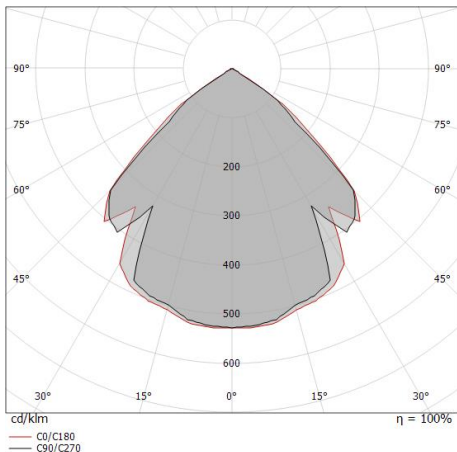

Energieeffizienzklasse

ieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	59 %
Lichtstrom (Lichtquelle)	2100 lm
Leuchten Lichtstrom	1239 lm
Consumption	28 W
Leuchten Lichtausbeute	44 lm/W
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

UGR


UGR axial	25.7
UGR transversal	25.7
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Optik C0/C180	95°
Light distribution simmetry	Symmetrical

Mongolfier_P3 | Pendant Luminaires | Accessories

8148

 	Dimmer 220-240V	Code KIT0026
	Dimmer Radio-frequenza, 85-240V	Code KIT0080