



Colgantes | 220-240 V  
165 topLED 49 W DC - 54 W AC | CRI 90  
8529

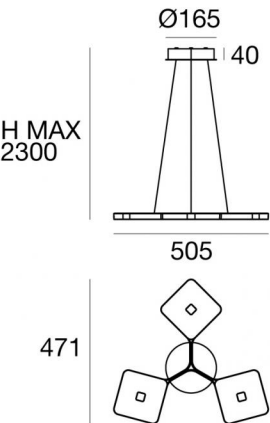

| Datos técnicos                                            |                 |
|-----------------------------------------------------------|-----------------|
| Designer                                                  | Pio e Tito Toso |
| Año de realización                                        | 2018            |
| Tipo                                                      | Superficie      |
| Posición de instalación                                   | Techo           |
| Ambiente de instalación                                   | Interiores      |
| Fuente de luz                                             | LED             |
| Poder total                                               | 54 W            |
| Flujo luminoso (fuente)                                   | 5001 lm         |
| Voltage                                                   | 220 - 240 V AC  |
| Frequency                                                 | 60 - 50 Hz      |
| CCT / Tone                                                | 3000 K          |
| Índice de rendimientos cromático                          | 90 Ra           |
| C.C. / C.V.                                               | AC              |
| Clase de aislamiento                                      | 1               |
| IP                                                        | IP20            |
| IP vano óptico                                            | IP40            |
| Test del hilo incandescente                               | 850°            |
| Montaje directo sobre superficies normalmente inflamables | Sí              |
| CE                                                        | Sí              |
| Driver incluido.                                          | driver          |
| Artículo regulable                                        | Phase cut       |
| Orientabilidad                                            | No              |
| Basculación                                               | No              |
| Practicabilidad                                           | No              |
| Transitabilidad                                           | No              |
| Cable incluido.                                           | Sí              |
| Largo del cable                                           | 2.3 m           |
| Resinado                                                  | No              |
| Tipología de emisión luminosa                             | Dos emisiones   |
| Peso neto                                                 | 2.5 Kg          |
| Protección descargas electrostáticas                      | No              |
| Protección contra sobretensiones                          | No              |



| Acabado cuerpo                    |                |
|-----------------------------------|----------------|
| Material                          | aluminio       |
| Color                             | negro RAL 9005 |
| Elaboración                       | Pintura        |
| Acabado difusor                   |                |
| Material                          | PC             |
| Color                             | transparente   |
| Acabado montura                   |                |
| Material                          | metal          |
| Color                             | negro RAL 9005 |
| Elaboración                       | Pintura        |
| Cables Electrification+suspension |                |
| Longitud máxima de                | 2300 mm        |

Colgantes | 220-240 V | 165 topLED 49 W DC - 54 W AC | CRI 90  
8529


Double emission pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 165 topLED LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 5001 lm, with a 102.1 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a embossed black ral 9005 finish, processed by means of coating; the diffuser is made of PC; the mounting frame is made of metal, with a embossed black ral 9005 finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 2.5 kg.

The total absorbed power is 54 W. The power supply cable is included and features a 2.3 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

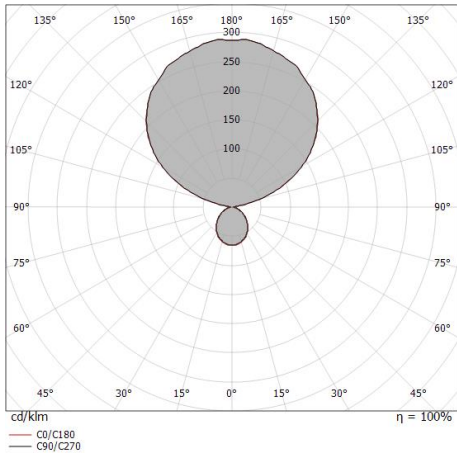


| Clase de eficiencia energética                                               |  |
|------------------------------------------------------------------------------|--|
| Este producto contiene 3 fuentes de luz de clase de eficiencia energética F. |  |

| Características Luminotécnicas                |                |
|-----------------------------------------------|----------------|
| Light Output Ratio (LOR)                      | 96 %           |
| Flujo luminoso (fuente)                       | 5001 lm        |
| Flujo luminoso de luminaria                   | 4824 lm        |
| Consumption                                   | 54 W           |
| Rendimiento luminoso de las luminarias        | 89 lm/W        |
| Temperatura de color                          | 3000 K         |
| Standard Deviation of Colour Matching         | 3 Step MacAdam |
| Índice de rendimientos cromático              | 90 Ra          |
| Temperatura de unión (luminaria)              | 80             |
|                                               |                |
| Temperatura estándar del ambiente de servicio | 25°C           |

| LED Life / Failure Ratio             |  |
|--------------------------------------|--|
| L70 B20 C0 72500h (at Tj 115 Ta 25 ) |  |

| OPTICAL                     |             |
|-----------------------------|-------------|
| Óptica C0/C180              | 97°         |
| Light distribution simmetry | Symmetrical |



Dimmer  
220-240V

Code  
KIT0026



Dimmer  
Radio-frequenza, 85-240V

Code  
KIT0080