




Tablet_P2



Pendelleuchte | 220-240 V
108 topLED 35 W DC | 41 W AC | CRI 80
8479

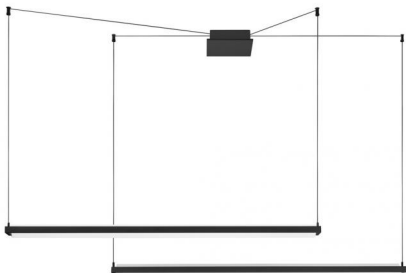

Technische Daten	
Jahr der Verwirklichung	2018
Typ	Oberfläche
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Optik	Diffuses
Light emission direction	downward
Lampe Nennleistung	35 W DC
Gesamtleistung	41 W
Lichtstrom (Lichtquelle)	5114 lm
Voltage	220 - 240 V AC
Frequency	60 - 50 Hz
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP40
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Phase cut
Schwenkbarkeit	Orientabile
Gesamtwinkel (vertikale Ebene)	0 °
Gesamtwinkel (horizontale Ebene)	350 °
Drehbarkeit	Nein
Begehrbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	5 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	3.6 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

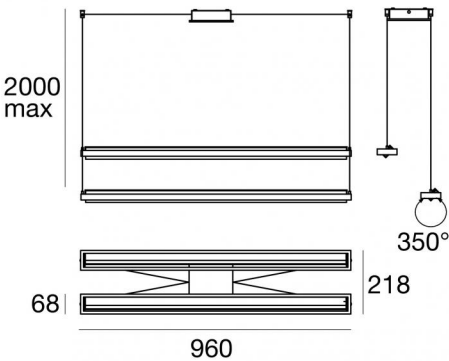

Oberfläche Gehäuse	
Material	Aluminium
Farbe	Schwarz RAL 9005
Bearbeitungstyp	Lackierung
Oberfläche Diffusor	
Material	PC
Farbe	Opal
Cables Electrification+suspension	
Max. Kabellänge	5000 mm



Pendelleuchte | 220-240 V | 108 topLED 35 W DC - 41 W AC | CRI 80
8479



Single emission pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 108 topLEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 5114 lm, with a 146.1 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a embossed black ral 9005 finish, processed by means of coating; the diffuser is made of PC. The ingress protection degree is IP40; the total weight is of 3.6 kg.

The total absorbed power is 41 W. The power supply cable is included and features a 5 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

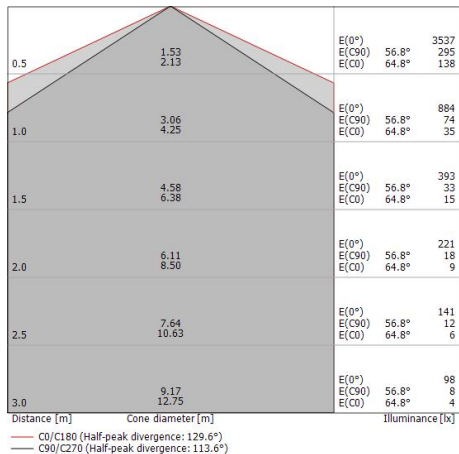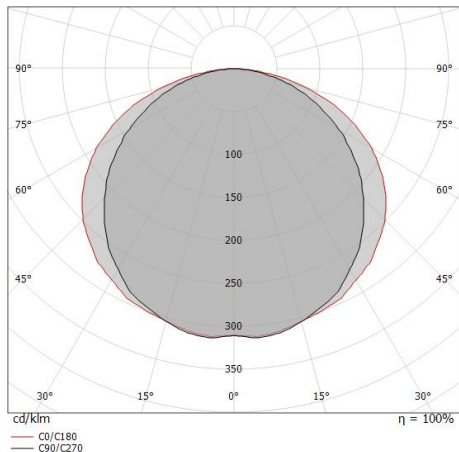

Energieeffizienzklasse

Dieses Produkt enthält 6 Lichtquellen der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	53 %
Lichtstrom (Lichtquelle)	5114 lm
Leuchten Lichtstrom	2740 lm
Consumption	41 W
Leuchten Lichtausbeute	66 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	80 Ra
Verbindungstemperatur (Leuchte)	80

Standardumgebungstemperatur	25°C
-----------------------------	------

LED Life / Failure Ratio


L70 B20 C0 72500h

UGR

UGR axial	27.4
UGR transversal	29.2
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Optik C90/C270	114°
Optik C0/C180	130°
Light distribution simmetry	Symmetrical 2 assis



Dimmer
220-240V

Code
KIT0026



Dimmer
Radio-frequenza, 85-240V

Code
KIT0080