




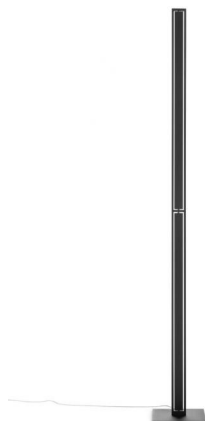

Luminaria de pie | 220-240 V
108 topLED 31 W DC - 36 W AC | CRI 80
8453



Datos técnicos	
Año de realización	2018
Tipo	Luminaria de pie
Posición de instalación	Piso
Ambiente de instalación	Interiores
Fuente de luz	LED
Circuit structure	topLED
Óptica	Difusa
Light emission direction	frontal
Potencia nominal	31 W DC
Poder total	36 W
Flujo luminoso (fuente)	4640 lm
Voltage	220 - 240 V AC
Frequency	60 - 50 Hz
CCT / Tone	3000 K
Índice de rendimientos cromático	80 Ra
C.C. / C.V.	AC
Clase de aislamiento	1
IP	IP20
Test del hilo incandescente	850°
Montaje directo sobre superficies normalmente inflamables	Sí
CE	Sí
Driver incluido.	driver
Artículo regulable	PUSH DIM
Orientabilidad	No
Basculación	No
Practicabilidad	No
Transitabilidad	No
Cable incluido.	Sí
Enchufe eléctrico	Type F+E
Largo del cable	4.7 m
Resinado	No
Tipología de emisión luminosa	Una emisión
Peso neto	7.5 Kg
Protección descargas electrostáticas	No
Protección contra sobretensiones	No



Acabado cuerpo	
Material	aluminio
Color	Negro
Elaboración	Pintura
Acabado difusor	
Material	PC
Color	opalino

Luminaria de pie | 220-240 V | 108 topLED 31 W DC - 36 W AC | CRI 80
8453



Single emission floor lamp for indoor application. The warm white LED light source with a diffused light distribution is composed of 108 topLED LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 4640 lm, with a 149.7 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a black finish, processed by means of coating; the diffuser is made of PC. The ingress protection degree is IP20; the total weight is of 7.5 kg.

The total absorbed power is 36 W. The power supply cable is included and features a 4.7 m length.

The device features protection class I and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

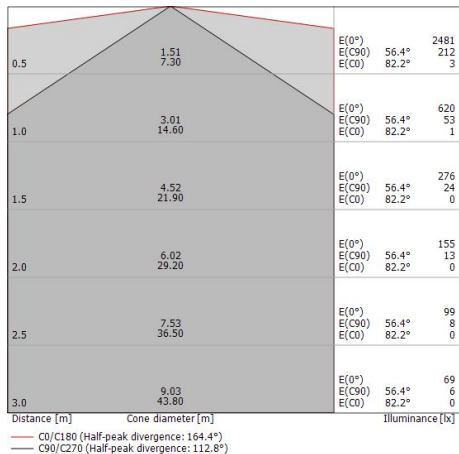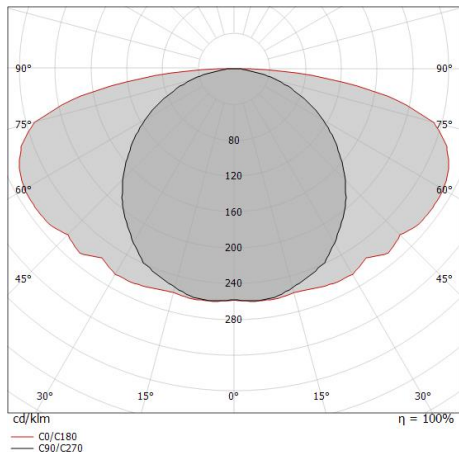

Clase de eficiencia energética

Este producto contiene 6 fuentes de luz de clase de eficiencia energética D.

Características Luminotécnicas

Light Output Ratio (LOR)	51 %
Flujo luminoso (fuente)	4640 lm
Flujo luminoso de luminaria	2402 lm
Consumption	36 W
Rendimiento luminoso de las luminarias	66 lm/W
Temperatura de color	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Índice de rendimientos cromático	80 Ra
Temperatura de unión (luminaria)	80
Temperatura estándar del ambiente de servicio	25°C

LED Life / Failure Ratio

L70 B20 C0 72500h

UGR

UGR axial	14.6
UGR transversal	15.5
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Óptica C90/C270	113°
Óptica C0/C180	164°
Light distribution simmetry	Symmetrical 2 assis