




Wandleuchten | 220-240 V
60 topLED 20 W DC - 25 W AC | CRI 90
7776

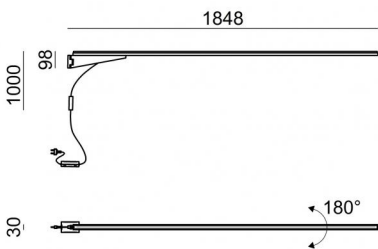

Technische Daten	
Jahr der Verwirklichung	2014
Typ	Oberfläche
Installationsposition	Wand
Installationsumgebung	Indoor
Lichtquelle	LED
Optik	Double Asymmetric
Light emission direction	upward
Lampe Nennleistung	20 W DC
Gesamtleistung	25 W
Lichtstrom (Lichtquelle)	2559 lm
Voltage	220 - 240 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	2
IP	IP20
IP optisches System	IP40
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Touch 5%-100%
Schwenkbarkeit	Nein
Drehbarkeit	Ja
Gesamtwinkel (horizontale Ebene)	0 °
Gesamtwinkel (vertikale Ebene)	180 °
Begehrbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Steckdose	Type C
Kabellänge	4 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	2.93 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Gehäuse	
Material	Aluminium
Farbe	poliert

Oberfläche Diffusor	
Material	PMMA
Bearbeitungstyp	Sandstrahlen

Wandleuchten | 220-240 V | 60 topLED 20 W DC - 25 W AC | CRI 90
7776



Single emission wall lights for indoor application. The warm white LED light source with a double asymmetric light distribution is composed of 60 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2559 lm, with a 128.0 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a translucent finish; the diffuser is made of pmma with a sandblasting treatment. The ingress protection degree is IP20; the total weight is of 2.93 kg.

The total absorbed power is 25 W. The power supply cable is included and features a 4 m length.

The device features protection class II and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

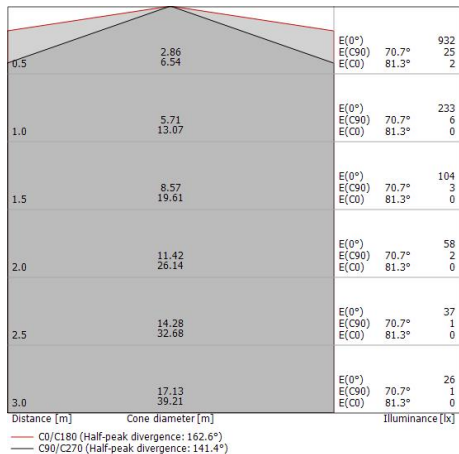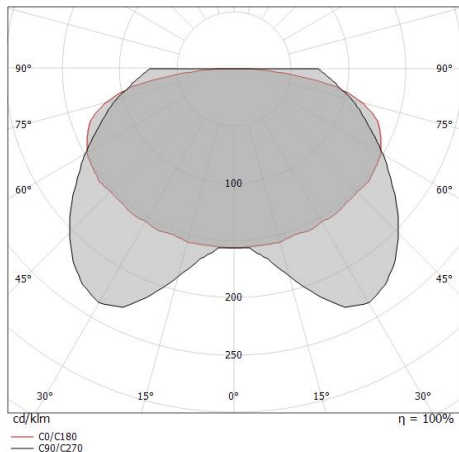

Energieeffizienzklasse	
Dieses Produkt enthält 6 Lichtquellen der Energieeffizienzklasse E.	

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	58 %
Lichtstrom (Lichtquelle)	2559 lm
Leuchten Lichtstrom	1489 lm
Consumption	25 W
Leuchten Lichtausbeute	59 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

LED Life / Failure Ratio	
L80 B20 C0 80000h	

UGR	
UGR axial	27.1
UGR transversal	28.4
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C90/C270	141°
Optik C0/C180	163°
Light distribution simmetry	Symmetrical 2 assis