




Luminaria de pared | 220-240 V
1 x powerLED 8.5 W DC - 10 W AC | CRI 90
9294



Datos técnicos	
Año de realización	2021
Tipo	Luminaria de pared
Posición de instalación	Pared
Ambiente de instalación	Interiores
Fuente de luz	LED
Poder total	10 W
Flujo luminoso (fuente)	640 lm
Voltage	220 - 240 V AC
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Índice de rendimientos cromático	90 Ra
C.C. / C.V.	AC
Clase de aislamiento	1
IP	IP20
Test del hilo incandescente	650°
Montaje directo sobre superficies normalmente inflamables	Sí
CE	Sí
Driver incluido.	driver
Artículo regulable	No
Orientabilidad	Orientabile
ángulo total (plano vertical)	360 °
ángulo total (plano horizontal)	180 °
Basculación	No
Practicabilidad	No
Transitabilidad	No
Cable incluido.	No
Resinado	No
Tipología de emisión luminosa	Una emisión
Peso neto	1.270 Kg
Protección descargas electrostáticas	No
Protección contra sobretensiones	No

Acabado cuerpo	
Material	metal
Color	rojo
Elaboración	Pintura
Acabado difusor	
Material	PMMA
Color	transparente
Acabado montura	
Material	metal
Color	rojo
Elaboración	Pintura

Luminaria de pared | 220-240 V | 1 x powerLED 8.5 W DC - 10 W AC | CRI 90
9294



Single emission wall lights for indoor application. The warm white LED light source with a medium wide flood light distribution is composed of 1 powered LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 640 lm, with a 75.3 lm/W nominal luminous efficacy.

The device body is made of metal and features a red ral 3000 finish, processed by means of coating; the diffuser is made of pmma; the mounting frame is made of metal, with a red ral 3000 finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 1.270 kg.

The total absorbed power is 10 W.

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

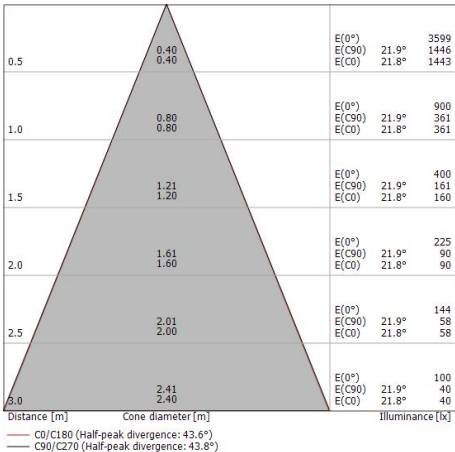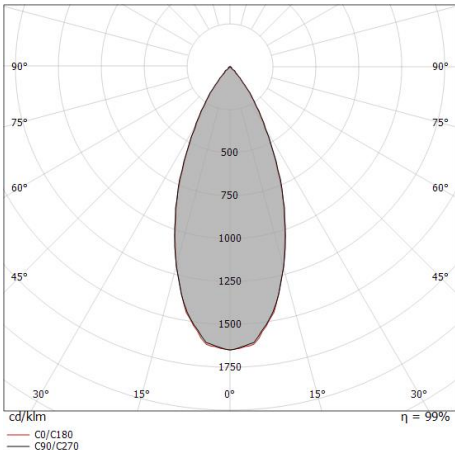

Clase de eficiencia energética

Este producto contiene una fuente de luz de clase de eficiencia energética F.

Características Luminotécnicas

Light Output Ratio (LOR)	85 %
Flujo luminoso (fuente)	640 lm
Flujo luminoso de luminaria	545 lm
Consumption	10 W
Rendimiento luminoso de las luminarias	54 lm/W
Temperatura de color	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Índice de rendimientos cromático	90 Ra
Temperatura de unión (luminaria)	80

Temperatura estándar del ambiente de servicio	25°C
---	------

LED Life / Failure Ratio

L80 B20 C0 80000h (at Tj 85 Ta 25)

UGR

UGR axial	17.5
UGR transversal	17.3
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Óptica C0/C180	44°
Light distribution simmetry	Symmetrical