




Colgantes | 220-240 V | 1 topLED 28 W DC - 31 W AC
CRI 90

9302

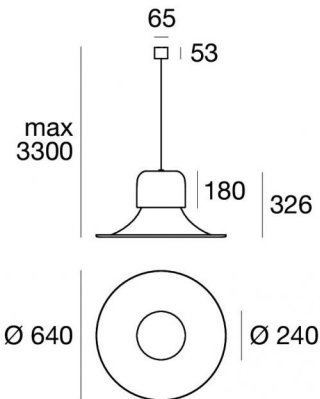

Datos técnicos	
Año de realización	2021
Tipo	Colgantes
Posición de instalación	Techo
Ambiente de instalación	Interiores
Fuente de luz	LED
Circuit structure	topLED
Óptica	Difusa
Light emission direction	downward
Potencia nominal	28 W DC
Poder total	31 W
Flujo luminoso (fuente)	3234 lm
Voltage	220 - 240 V AC
Frequency	50 - 60 Hz
CCT / Tone	2700 K
Índice de rendimientos cromático	90 Ra
C.C. / C.V.	AC
Clase de aislamiento	1
IP	IP20
Test del hilo incandescente	650°
Montaje directo sobre superficies normalmente inflamables	Sí
CE	Sí
Driver incluido.	driver
Artículo regulable	DALI-2 - PUSH DIM
Orientabilidad	No
Basculación	No
Practicabilidad	No
Transitabilidad	No
Cable incluido.	Sí
Largo del cable	3 m
Resinado	No
Tipología de emisión luminosa	Una emisión
Peso neto	3.600 Kg
Protección descargas electrostáticas	No
Protección contra sobretensiones	No

Acabado cuerpo	
Material	aluminio - aluminio
Color	aluminio
Elaboración	Pintura
Acabado difusor	
Material	PMMA
Color	opalino
Acabado montura	
Material	metal
Elaboración	Pintura

Colgantes | 220-240 V | 1 topLED 28 W DC - 31 W AC | CRI 90
9302


Single emission pendant luminaires for indoor application. The super warm LED light source with a diffused light distribution is composed of 1 topped LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 3234 lm, with a 115.5 lm/W nominal luminous efficacy.

The device body is made of aluminium, processed by means of coating
The device body is made of aluminium and features a aluminium finish; the diffuser is made of pmma; the mounting frame is made of metal, processed by means of coating. The ingress protection degree is IP20; the total weight is of 3.600 kg.

The total absorbed power is 31 W. The power supply cable is included and features a 3 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

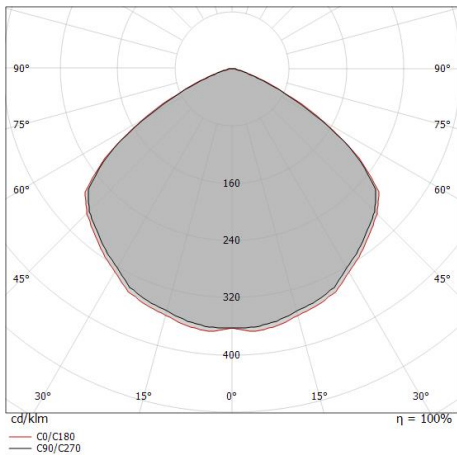

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	1.55 1.56	E(0°) E(C90) E(C0) 2676 214 216
1.0	3.10 3.12	E(0°) E(C90) E(C0) 669 54 54
1.5	4.66 4.67	E(0°) E(C90) E(C0) 297 24 24
2.0	6.21 6.23	E(0°) E(C90) E(C0) 167 13 14
2.5	7.76 7.79	E(0°) E(C90) E(C0) 107 9 9
3.0	9.31 9.35	E(0°) E(C90) E(C0) 74 6 6

— C0/C180 (Half-peak divergence: 114.6°)
— C90/C270 (Half-peak divergence: 114.4°)

Clase de eficiencia energética

Este producto contiene una fuente de luz de clase de eficiencia energética F.

Características Luminotécnicas

Light Output Ratio (LOR)	57 %
Flujo luminoso (fuente)	3234 lm
Flujo luminoso de luminaria	1848 lm
Consumption	31 W
Rendimiento luminoso de las luminarias	59 lm/W
Temperatura de color	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Índice de rendimientos cromático	90 Ra
Temperatura de unión (luminaria)	80

Temperatura estándar del ambiente de servicio	25°C
---	------

LED Life / Failure Ratio

L70 B20 C0 72500h

UGR

UGR axial	25.3
UGR transversal	25.4
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Óptica C0/C180	114°
Light distribution simmetry	Symmetrical