





Pendelleuchte | 220-240 V
2 topLED 33 W DC - 36 W AC | CRI 90
9310

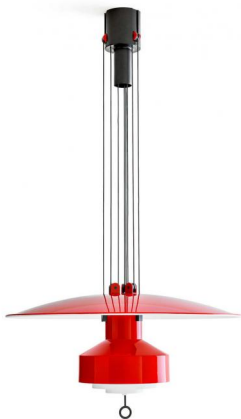

Technische Daten	
Jahr der Verwirklichung	2021
Typ	Pendelleuchte
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Gesamtleistung	36 W
Lichtstrom (Lichtquelle)	3672 lm
Voltage	220 - 240 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	2700 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP20
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	DALI-2 - PUSH DIM
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	9.3 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Zweiflammig
Nettogewicht	7.000 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

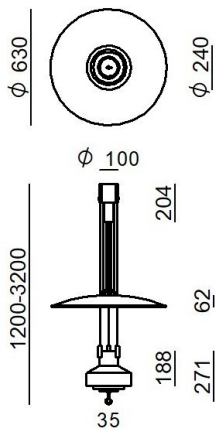

Oberfläche Gehäuse	
Material	Metall - Metall
Farbe	Weiß RAL 9003 matt
Bearbeitungstyp	Lackierung - Lackierung
Oberfläche Diffusor	
Material	PMMA
Farbe	Opal
Bearbeitungstyp	Satinieren
Oberfläche Fassung	
Material	Metall
Farbe	Schwarz
Bearbeitungstyp	Lackierung

Pendelleuchte | 220-240 V | 2 topLED 33 W DC - 36 W AC | CRI 90
9310



Double emission pendant luminaires for indoor application. The super warm LED light source with a diffused light distribution is composed of 2 topped LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 3672 lm, with a 111.3 lm/W nominal luminous efficacy.

The device body is made of metal, processed by means of coating The device body is made of metal and features a white ral 9003 matt finish, processed by means of coating; the diffuser is made of pmma with a satin finishing treatment; the mounting frame is made of metal, with a black finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 7.000 kg.

The total absorbed power is 36 W. The power supply cable is included and features a 9.3 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

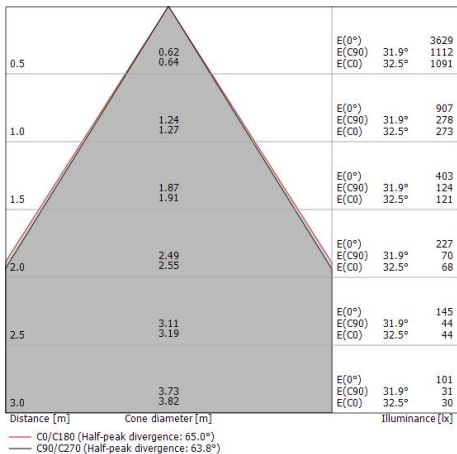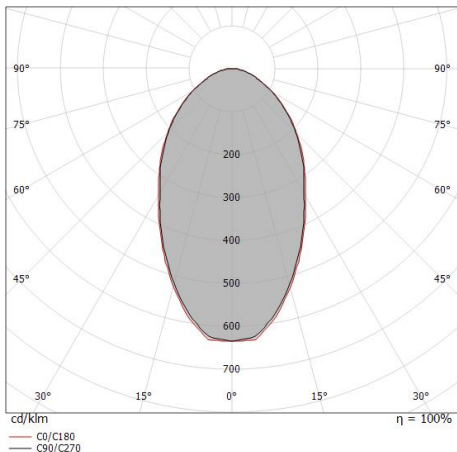

Energieeffizienzklasse

Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse F.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	38 %
Lichtstrom (Lichtquelle)	3672 lm
Leuchten Lichtstrom	1428 lm
Consumption	36 W
Leuchten Lichtausbeute	39 lm/W
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80

Standardumgebungstemperatur	25°C
-----------------------------	------

LED Life / Failure Ratio

L70 B20 C0 72500h

UGR

UGR axial	22
UGR transversal	22
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Optik C0/C180	64°
Light distribution simmetry	Symmetrical