



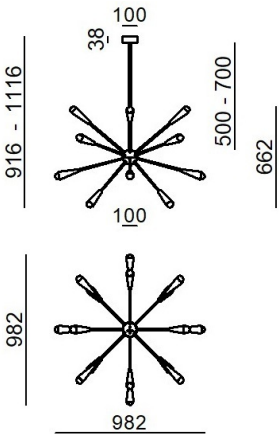

Pendelleuchte | 220-240 V | 16xE14
9590

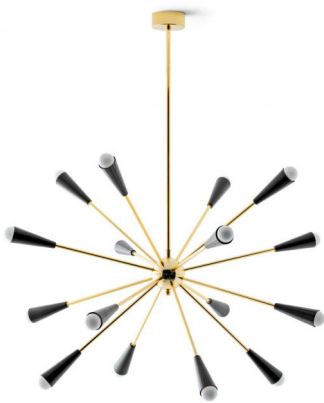

Technische Daten	
Jahr der Verwirklichung	2021
Typ	Pendelleuchte
Installationsposition	Decke
Installationsumgebung	Indoor
Anschluss der Leuchte	16 x E14
Light emission direction	downward and upward
Frequency	50-60 Hz
Isolierklasse	1
IP	IP20
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Nettogewicht	5.700 Kg

Oberfläche Gehäuse	
Material	Messing gebürstet
Farbe	Gold
Bearbeitungstyp	Tampongalvanisieren
Oberfläche Diffusor	
Material	Metall
Bearbeitungstyp	Lackierung
Oberfläche Fassung	
Material	Messing gebürstet
Farbe	Gold
Bearbeitungstyp	Tampongalvanisieren



Pendelleuchte | 220-240 V | 16xE14
9590

Double emission pendant luminaires for indoor application. LED
lamplamp included, lamp cap 16xE14.

The device body is made of brass and features a gold finish, processed
by means of electroplating; the diffuser is made of metal with a coating
treatment; the mounting frame is made of brass, with a gold finish,
processed by means of electroplating. The ingress protection degree is
IP20; the total weight is of 5.700 kg.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse	
Dieses Produkt enthält 16 Lichtquellen der Energieeffizienzklasse E.	
Illuminotechnical Eigenschaften	
Lichtstrom (Lichtquelle)	12896 lm
Farbtemperatur	2700 K
Farbwiedergabeindex	80 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C